




## View 380 WS ARGB

User's Manual  
Benutzerhandbuch  
Mode d'emploi  
Manual del usuario  
Manuale dell'utente  
Manual do Utilizador

安裝說明書  
用戶手冊  
ユーザーズマニュアル  
Руководство пользователя  
kullanıcı elkitabı  
(EEE Yönetmeliğine Uygundur)  
คู่มือการใช้

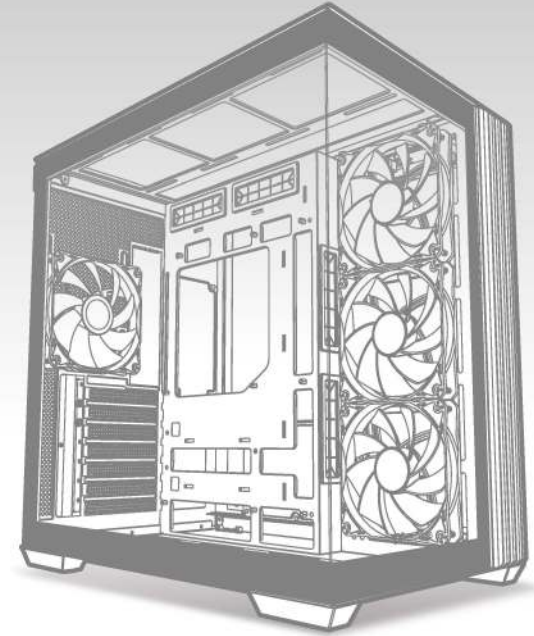

© 2025 Thermaltake Technology Co., Ltd. All Rights Reserved. 2025.07  
All other registered trademarks belong to their respective companies. [www.thermaltake.com](http://www.thermaltake.com)



## TT Premium



### TT Premium

To continue achieving the corporate mission of delivering the perfect user experience, Thermalright developed "TT Premium" with the essence of combining supreme quality products with a new logo design. TT Premium is far more than just a guarantee of quality. Behind the name, it represents the passion in DIY, Modding and Thermalright's desire to be the most innovative brand in the PC hardware market. To satisfy the demand of the high-end PC users, TT Premium follows its core values of Excellent Quality, Unique Design, Diverse Combinations and Boundless Creativity to provide a high performance PC product for every enthusiast. <http://tppremium.com>

## Tt LCS-Liquid Cooling Support Certification



Tt LCS Certified is a Thermalright exclusive certification applied to only products that pass the design and hardcore enthusiasts standards that a true LCS chassis should be held to. The Tt LCS certification was created so that we at Thermalright can designate to all power users which chassis have been tested to be best compatible with extreme liquid cooling configurations to ensure you get the best performance from the best features and fitment.

## Join Tt Community To Receive Benefits



Dear Valued Customer,  
Thank you for choosing Thermalright.  
As a new user we value your thoughts and opinions and your feedback is important to us. We at Thermalright would like to use this opportunity to invite you to join our Community Forums. Register today to start enjoying the full benefits of our community.



### Benefits of being a member:

- Quick and responsive user support
- Receive help and advice with new builds
- Keep up to date with new product releases
- Share your thoughts and builds with the community
- Enter monthly contests and giveaways

Brand official website  
<http://www.thermalright.com/>

Global Facebook  
<https://www.facebook.com/ThermalrightInc>

Taiwan Facebook  
<http://www.facebook.com/ThermalrightTW>

Global community forums  
<http://community.thermalright.com>

# CONTENTS

## Chapter 1. Product Introduction

|     |                             |    |
|-----|-----------------------------|----|
| 1.0 | Specification .....         | 01 |
| 1.1 | Accessory .....             | 02 |
| 1.2 | Dimension & Clearance ..... | 03 |


## Chapter 2. Installation Guide

|      |                                            |    |
|------|--------------------------------------------|----|
| 2.0  | Remove Components .....                    | 06 |
| 2.1  | Power Supply Unit (PSU) Installation ..... | 07 |
| 2.2  | Motherboard Installation .....             | 08 |
| 2.3  | HDD Installation .....                     | 09 |
| 2.4  | VGA Installation .....                     | 10 |
| 2.5  | Air Cooling Installation .....             | 11 |
| 2.6  | AIO Liquid Cooling Installation .....      | 12 |
| 2.7  | DIY Liquid Cooling Installation .....      | 13 |
| 2.8  | I/O Connection .....                       | 14 |
| 2.9  | ARGB Control Instruction .....             | 15 |
| 2.10 | Remove Filters .....                       | 16 |


|                              |                                                                                                                                                                              |                                    |                        |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|------------------------|
| Case Type                    | Mid Tower                                                                                                                                                                    |                                    |                        |
| Dimension (H*W*D)            | 411 x 285 x 447 mm (16.18 x 11.22 x 17.6 inch)                                                                                                                               |                                    |                        |
| Side Panel                   | Tempered Glass x 2                                                                                                                                                           |                                    |                        |
| Material                     | SPCC                                                                                                                                                                         |                                    |                        |
| Cooling System               | <b>Right(intake):</b><br>120 x 120 x 25 mm ARGB Lite Reverse fan (1000rpm, 21.9 dBA) x 3<br><b>Rear(exhaust):</b><br>120 x 120 x 25 mm ARGB Lite fan (1000rpm, 22.3 dBA) x 1 |                                    |                        |
| Drive Bays                   | 1 x 3.5", 2 x 2.5"                                                                                                                                                           |                                    |                        |
| Expansion Slots              | 7                                                                                                                                                                            |                                    |                        |
| Motherboards                 | 6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX)                                                                                                            |                                    |                        |
| Hidden-Connector Motherboard | 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX)                                                                                                                                    |                                    |                        |
| I/O Port                     | USB 3.2 (Gen 2) Type-C x 1, USB 3.0 x 2, HD Audio x 1                                                                                                                        |                                    |                        |
| PSU                          | Standard PS2 PSU (optional)                                                                                                                                                  |                                    |                        |
| Fan Support                  | Top                                                                                                                                                                          | 3 x 120 mm, 2 x 120 mm, 1 x 120 mm |                        |
|                              | Right                                                                                                                                                                        | 3 x 120 mm, 2 x 120 mm, 1 x 120 mm | 2 x 140 mm, 1 x 140 mm |
|                              | Rear                                                                                                                                                                         | 1 x 120 mm                         |                        |
|                              | Bottom                                                                                                                                                                       | 3 x 120 mm, 2 x 120 mm, 1 x 120 mm |                        |
| Radiator Support             | Top                                                                                                                                                                          | 1 x 360 mm, 1 x 240 mm, 1 x 120 mm |                        |
|                              | Right                                                                                                                                                                        | 1 x 240 mm, 1 x 120 mm             | 1 x 280 mm, 1 x 140 mm |
|                              | Rear                                                                                                                                                                         | 1 x 120 mm                         |                        |
|                              | Bottom                                                                                                                                                                       | 1 x 360 mm, 1 x 240 mm, 1 x 120 mm |                        |
| Clearances                   | CPU cooler height limitation                                                                                                                                                 | 160 mm                             |                        |
|                              | VGA length limitation                                                                                                                                                        | 415 mm                             |                        |
|                              | PSU length limitation                                                                                                                                                        | 200 mm                             |                        |

| Figure                                                                              | Parts Name              | Q'ty | Used for                           |
|-------------------------------------------------------------------------------------|-------------------------|------|------------------------------------|
|  | Stand-off #6-32 x 6.5mm | 3    | Motherboard                        |
|  | Screw #6-32 x 6mm       | 11   | Power Supply / VGA                 |
|  | Screw #6-32 x 6mm       | 4    | 3.5" HDD                           |
|  | Screw M3 x 5mm          | 19   | Motherboard / 2.5" HDD / SSD       |
|  | Zip Ties                | 10   | Cable Management                   |
|  | Buzzer                  | 1    | Motherboard Alarm                  |
|  | Stand-off tool          | 1    | Motherboard Stand-off Installation |
|  | Cable Ties              | 5    | Cable Management                   |


## Chassis dimension

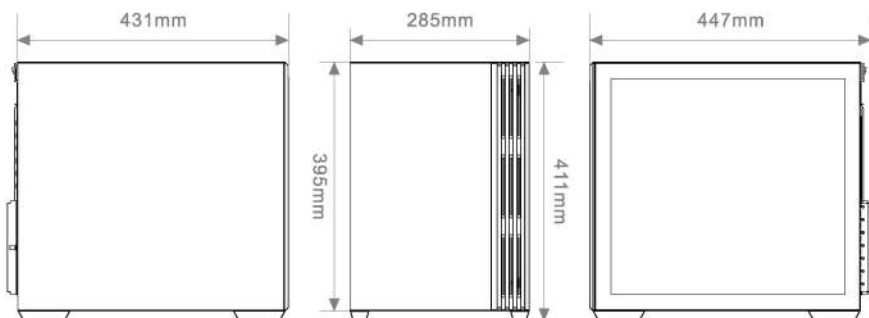


## Motherboard Compatibility: ITX / mATX / ATX

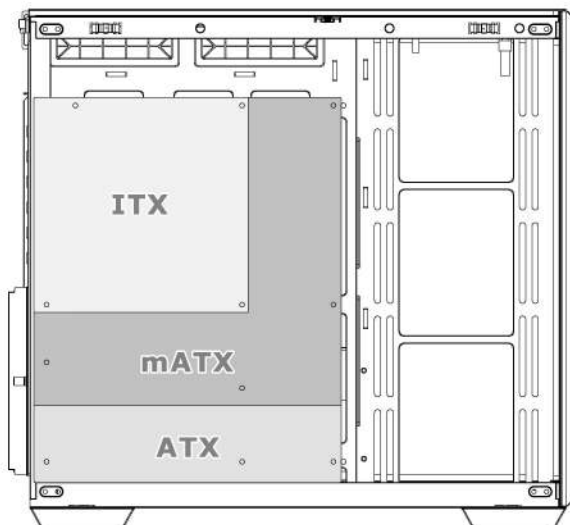



## CPU cooler max height: 160mm

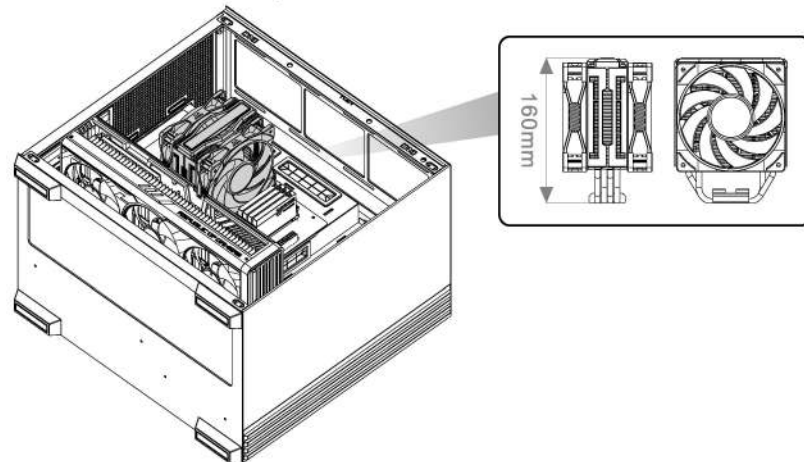

## VGA max length: 415mm

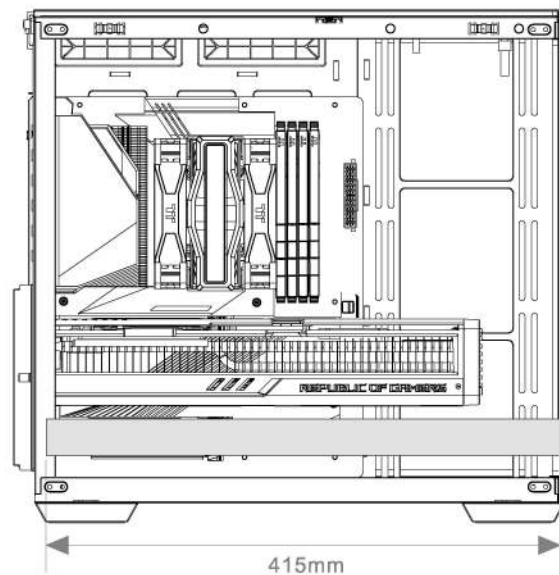


PSU max length: 200mm

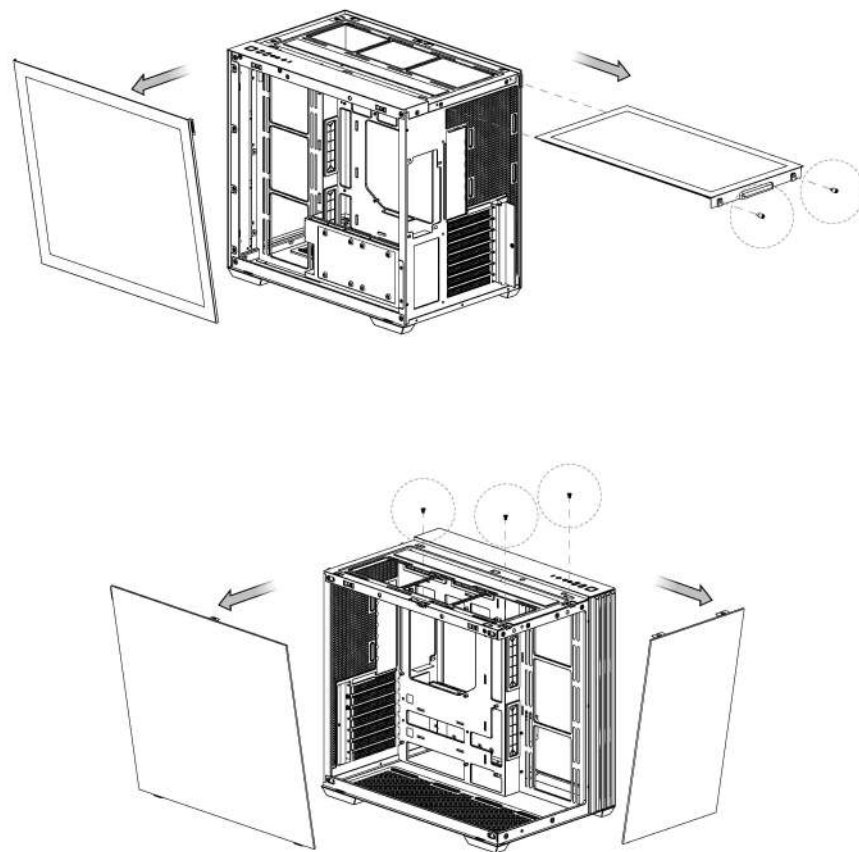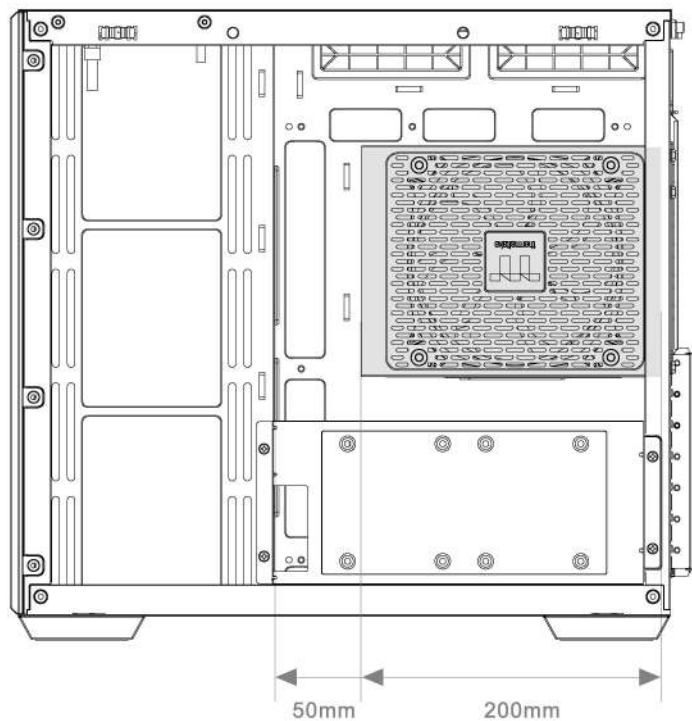







x 4

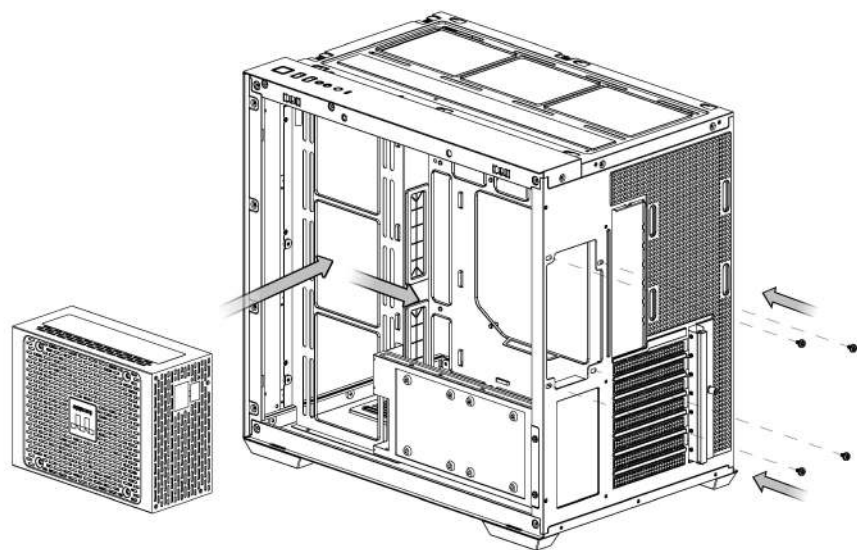


x 9

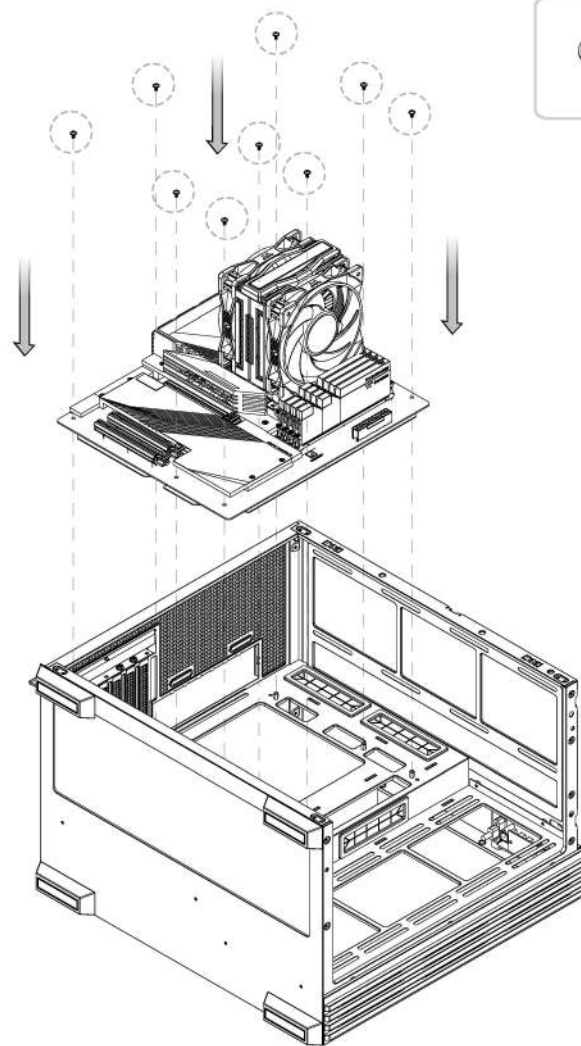

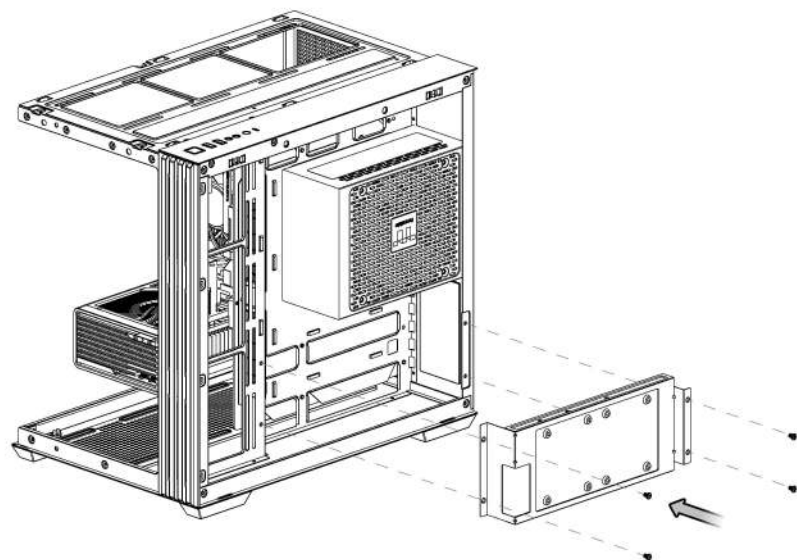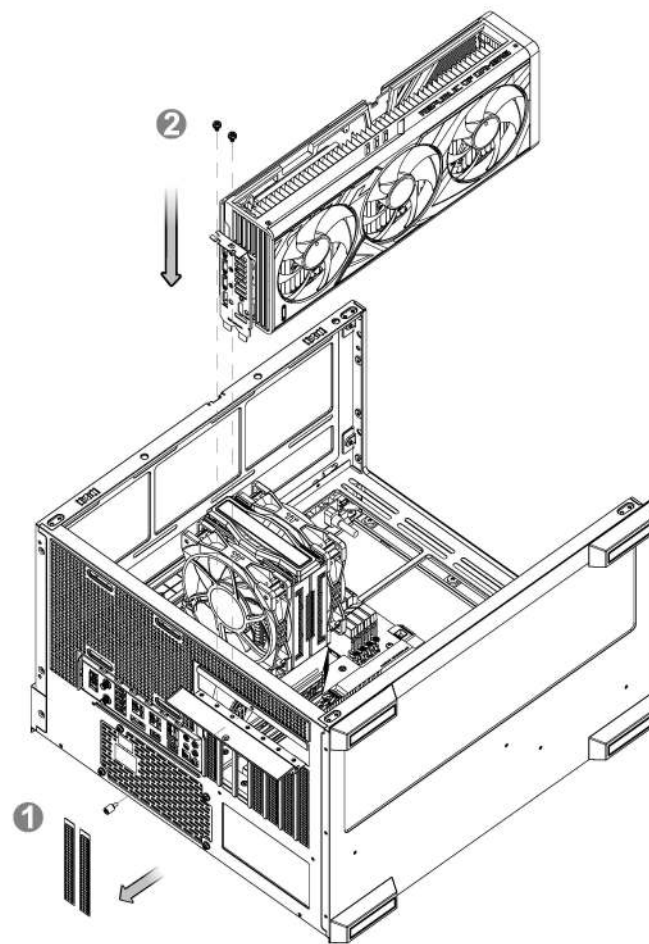
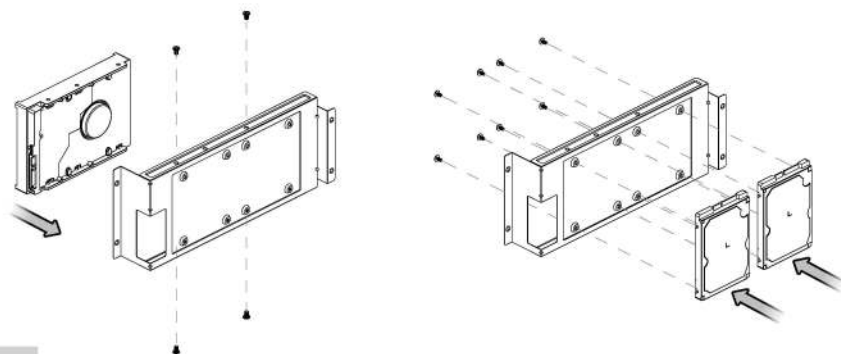
**3.5" HDD****x 4****2.5" SSD/HDD****x 8**

**Top**


120mm x 3

**Rear**


120mm x 1

**M/B Side**140mm x 2  
or  
120mm x 3**Bottom**


120mm x 3



**Top**

360mm x 1


**Rear**

120mm x 1

**M/B Side**280mm x 1  
or  
240mm x 1

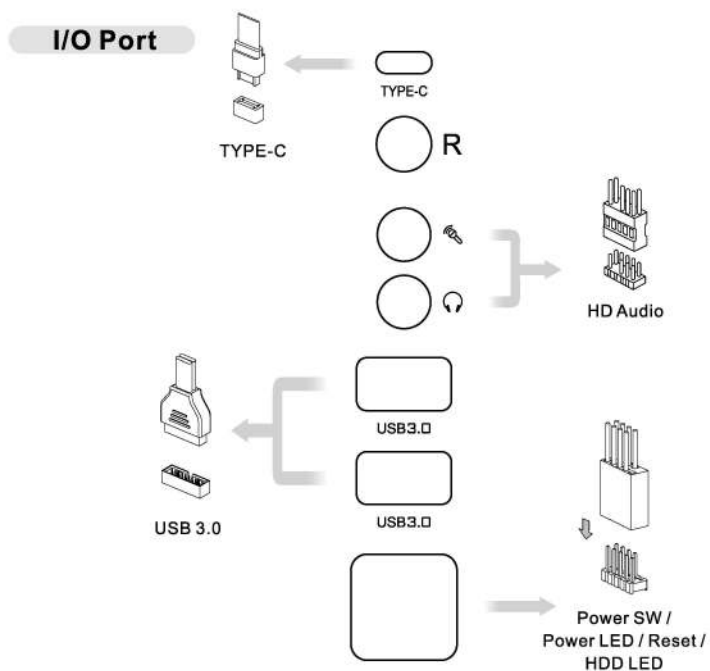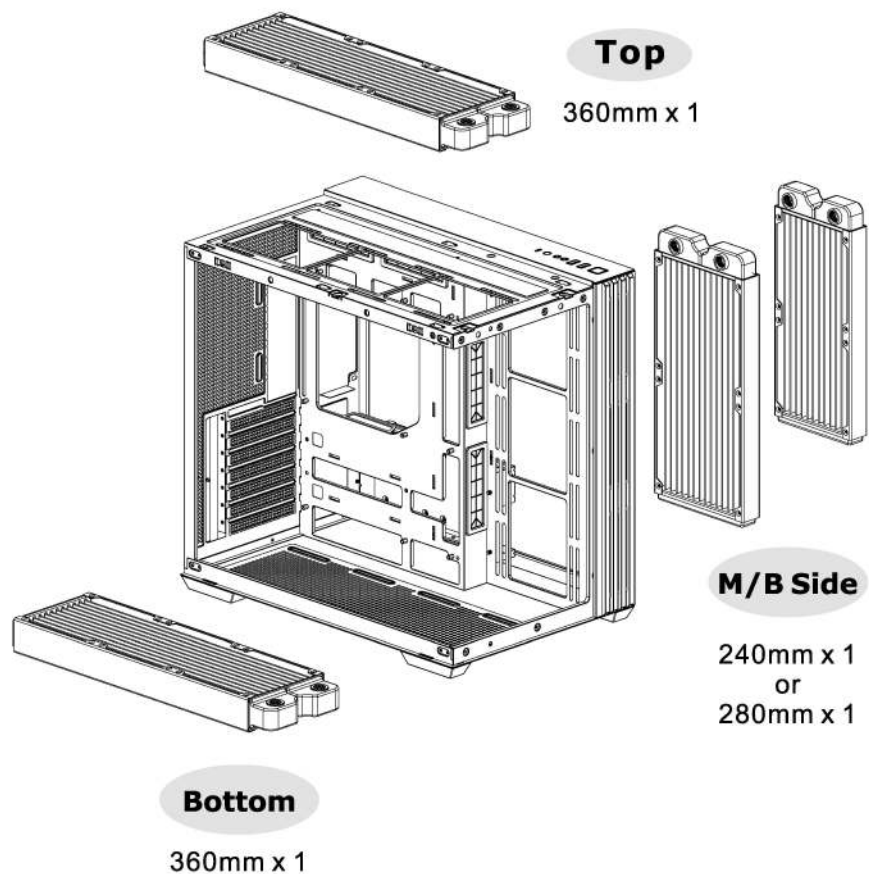

### Motherboard Header Diagram

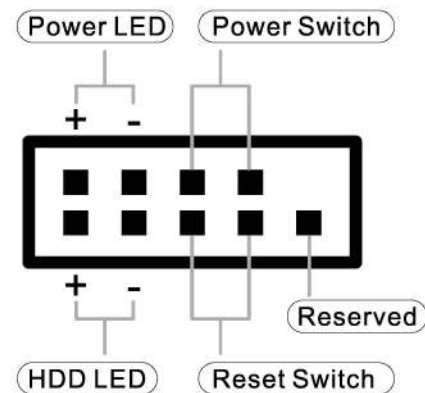

## ARGB Control Instruction – How to connect MB

## ASUS/ASRock/BIOSTAR

Aura Addressable Strip Header(s)



## MSI

JRGB-strip Header(S)



## GIGABYTE

AOURS RGB Fusion with Digital LEDs

