




View 380 WS ARGB

User's Manual
Benutzerhandbuch
Mode d'emploi
Manual del usuario
Manuale dell'utente
Manual do Utilizador

安裝說明書
用戶手冊
ユーザーズマニュアル
Руководство пользователя
kullanıcı elkitabı
(EEE Yönetmeliğine Uygundur)
คู่มือการใช้

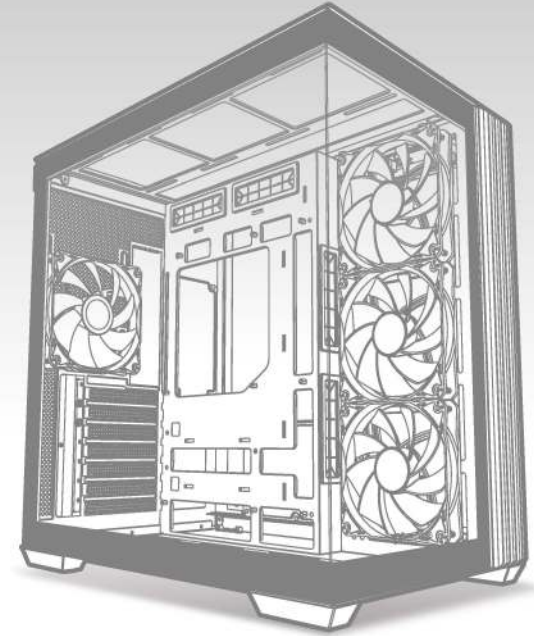

© 2025 Thermaltake Technology Co., Ltd. All Rights Reserved. 2025.07
All other registered trademarks belong to their respective companies. www.thermaltake.com



TT Premium



TT Premium

To continue achieving the corporate mission of delivering the perfect user experience, Thermalright developed "TT Premium" with the essence of combining supreme quality products with a new logo design. TT Premium is far more than just a guarantee of quality. Behind the name, it represents the passion in DIY, Modding and Thermalright's desire to be the most innovative brand in the PC hardware market. To satisfy the demand of the high-end PC users, TT Premium follows its core values of Excellent Quality, Unique Design, Diverse Combinations and Boundless Creativity to provide a high performance PC product for every enthusiast. <http://tppremium.com>

Tt LCS-Liquid Cooling Support Certification



Tt LCS Certified is a Thermalright exclusive certification applied to only products that pass the design and hardcore enthusiasts standards that a true LCS chassis should be held to. The Tt LCS certification was created so that we at Thermalright can designate to all power users which chassis have been tested to be best compatible with extreme liquid cooling configurations to ensure you get the best performance from the best features and fitment.

Join Tt Community To Receive Benefits



Dear Valued Customer,
Thank you for choosing Thermalright.
As a new user we value your thoughts and opinions and your feedback is important to us. We at Thermalright would like to use this opportunity to invite you to join our Community Forums. Register today to start enjoying the full benefits of our community.



Benefits of being a member:

- Quick and responsive user support
- Receive help and advice with new builds
- Keep up to date with new product releases
- Share your thoughts and builds with the community
- Enter monthly contests and giveaways

Brand official website
<http://www.thermalright.com/>

Global Facebook
<https://www.facebook.com/ThermalrightInc>

Taiwan Facebook
<http://www.facebook.com/ThermalrightTW>

Global community forums
<http://community.thermalright.com>

CONTENTS

Chapter 1. Product Introduction

1.0	Specification	01
1.1	Accessory	02
1.2	Dimension & Clearance	03


Chapter 2. Installation Guide

2.0	Remove Components	06
2.1	Power Supply Unit (PSU) Installation	07
2.2	Motherboard Installation	08
2.3	HDD Installation	09
2.4	VGA Installation	10
2.5	Air Cooling Installation	11
2.6	AIO Liquid Cooling Installation	12
2.7	DIY Liquid Cooling Installation	13
2.8	I/O Connection	14
2.9	ARGB Control Instruction	15
2.10	Remove Filters	16


Case Type	Mid Tower		
Dimension (H*W*D)	411 x 285 x 447 mm (16.18 x 11.22 x 17.6 inch)		
Side Panel	Tempered Glass x 2		
Material	SPCC		
Cooling System	Right(intake): 120 x 120 x 25 mm ARGB Lite Reverse fan (1000rpm, 21.9 dBA) x 3 Rear(exhaust): 120 x 120 x 25 mm ARGB Lite fan (1000rpm, 22.3 dBA) x 1		
Drive Bays	1 x 3.5", 2 x 2.5"		
Expansion Slots	7		
Motherboards	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX)		
Hidden-Connector Motherboard	9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX)		
I/O Port	USB 3.2 (Gen 2) Type-C x 1, USB 3.0 x 2, HD Audio x 1		
PSU	Standard PS2 PSU (optional)		
Fan Support	Top	3 x 120 mm, 2 x 120 mm, 1 x 120 mm	
	Right	3 x 120 mm, 2 x 120 mm, 1 x 120 mm	2 x 140 mm, 1 x 140 mm
	Rear	1 x 120 mm	
	Bottom	3 x 120 mm, 2 x 120 mm, 1 x 120 mm	
Radiator Support	Top	1 x 360 mm, 1 x 240 mm, 1 x 120 mm	
	Right	1 x 240 mm, 1 x 120 mm	1 x 280 mm, 1 x 140 mm
	Rear	1 x 120 mm	
	Bottom	1 x 360 mm, 1 x 240 mm, 1 x 120 mm	
Clearances	CPU cooler height limitation	160 mm	
	VGA length limitation	415 mm	
	PSU length limitation	200 mm	

Figure	Parts Name	Q'ty	Used for
	Stand-off #6-32 x 6.5mm	3	Motherboard
	Screw #6-32 x 6mm	11	Power Supply / VGA
	Screw #6-32 x 6mm	4	3.5" HDD
	Screw M3 x 5mm	19	Motherboard / 2.5" HDD / SSD
	Zip Ties	10	Cable Management
	Buzzer	1	Motherboard Alarm
	Stand-off tool	1	Motherboard Stand-off Installation
	Cable Ties	5	Cable Management


Chassis dimension

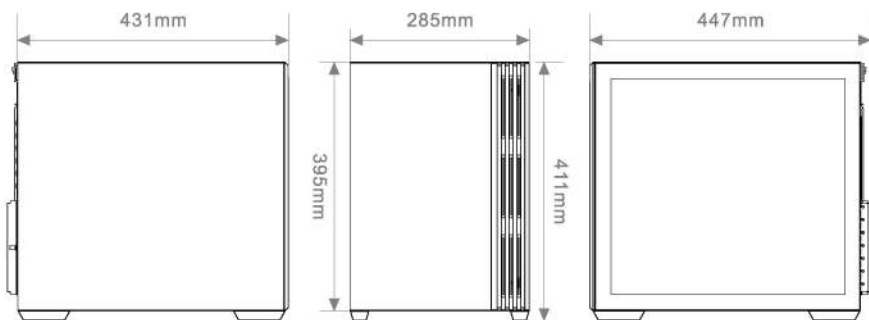


Motherboard Compatibility: ITX / mATX / ATX

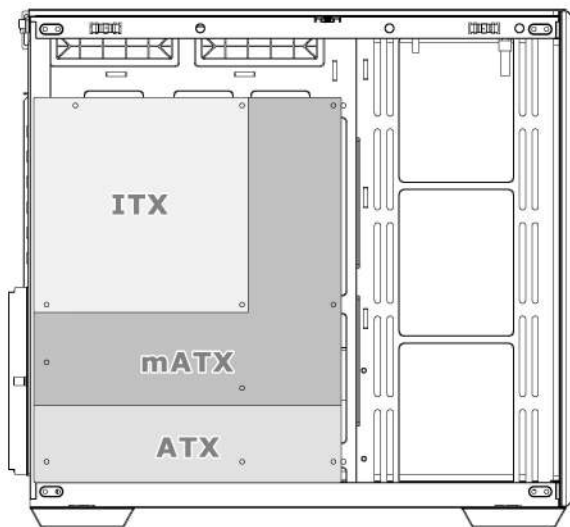



CPU cooler max height: 160mm

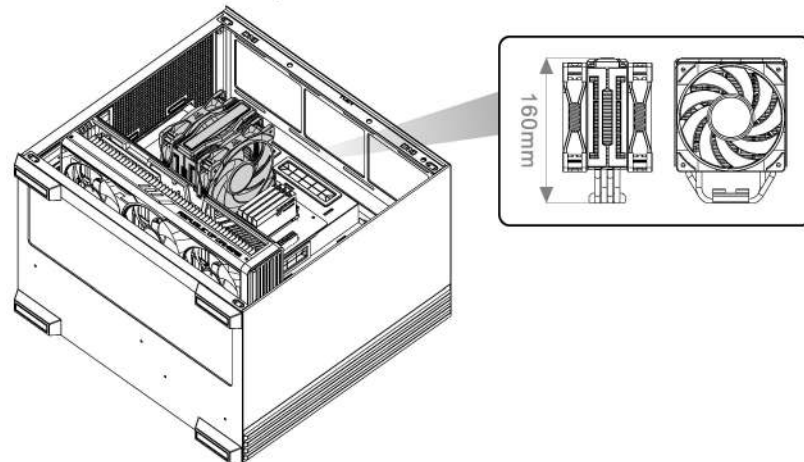

VGA max length: 415mm

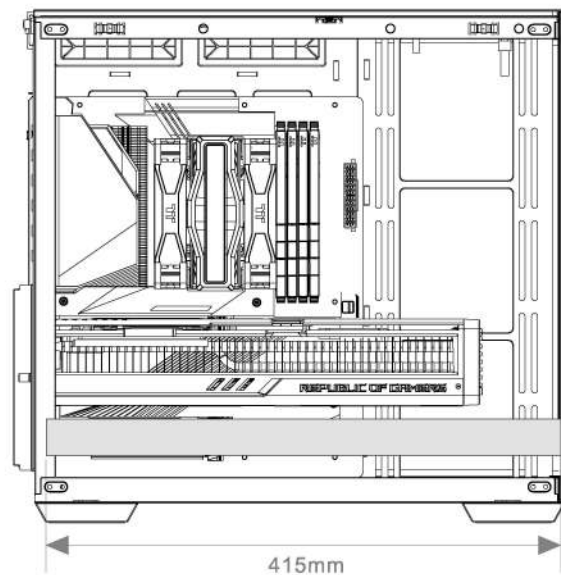


PSU max length: 200mm

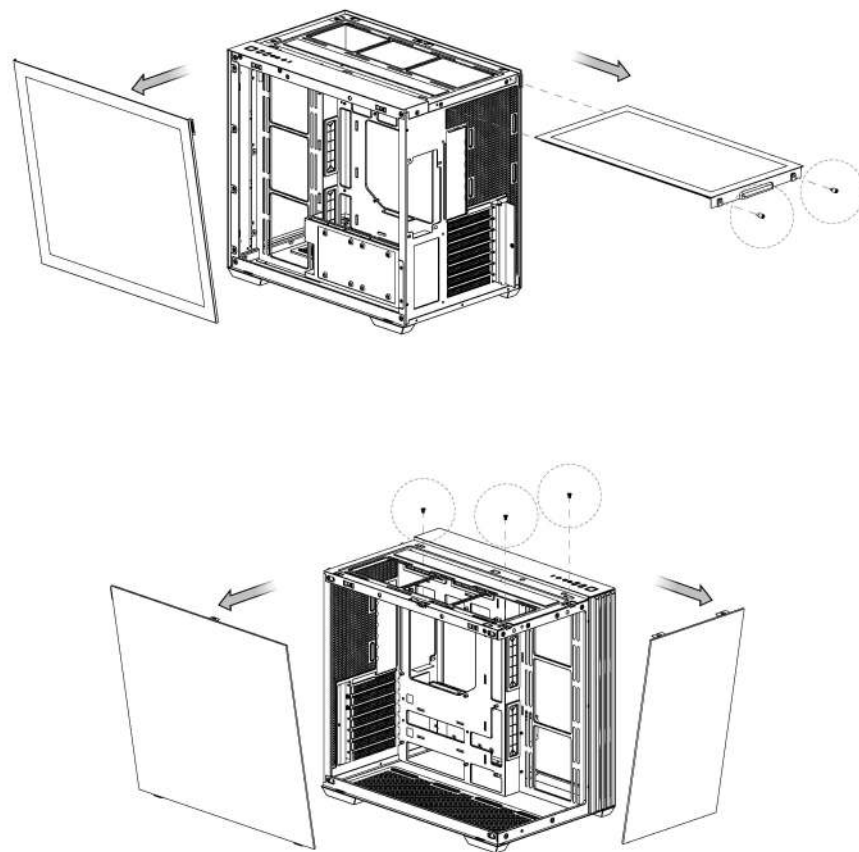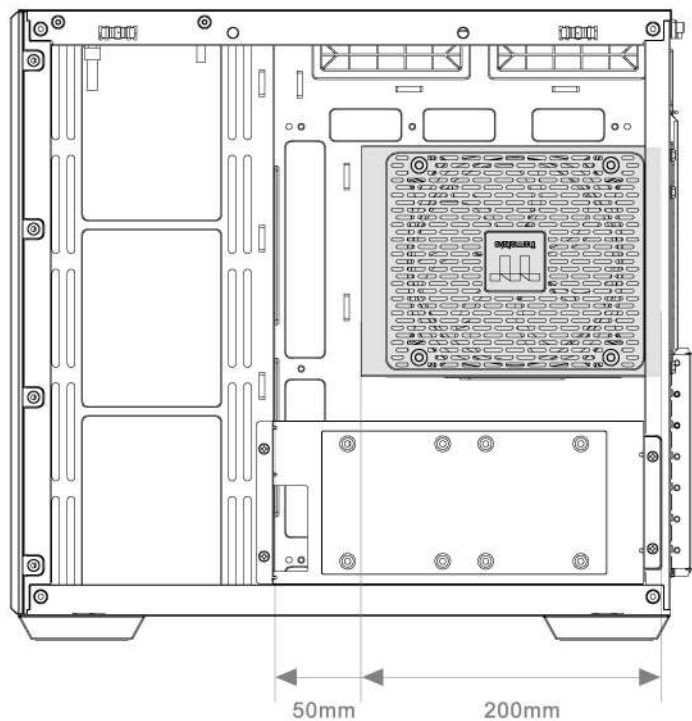







x 4

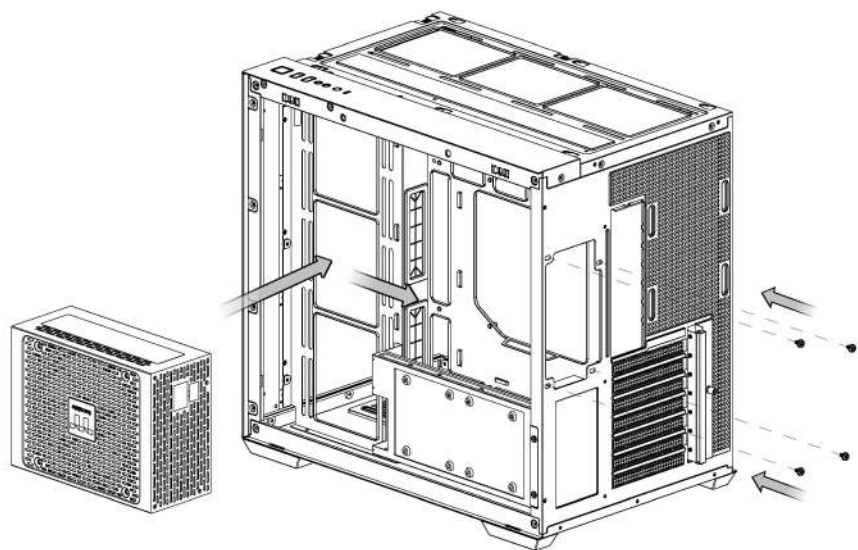

x 9

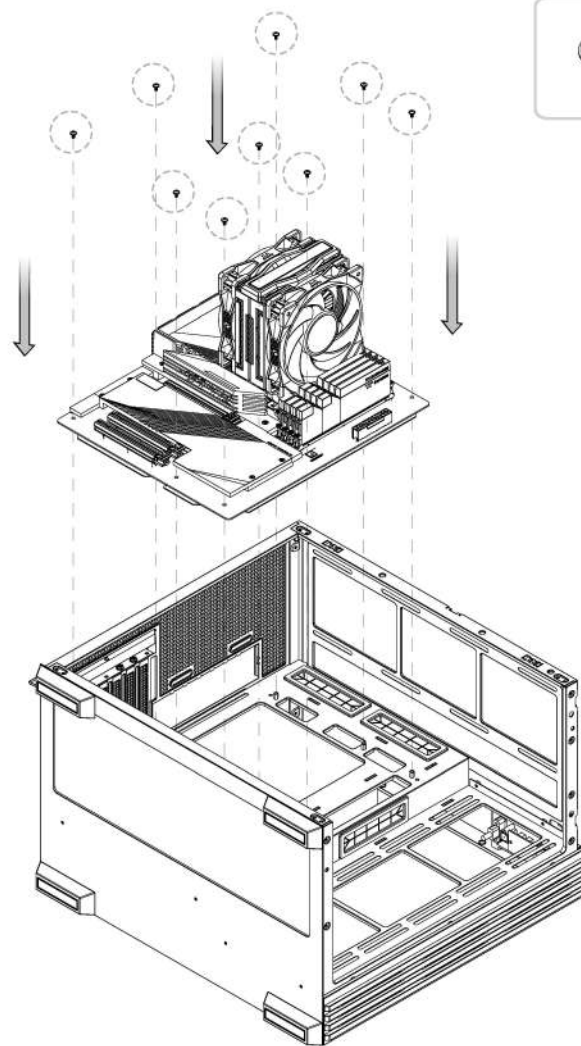


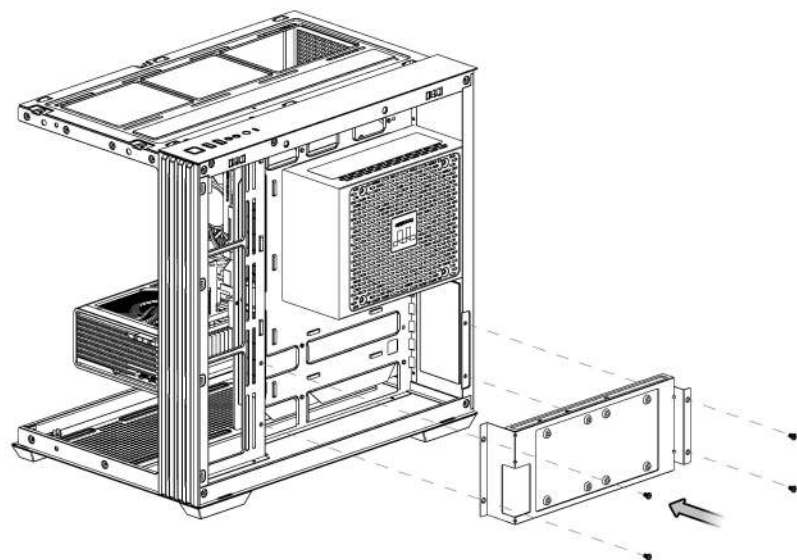
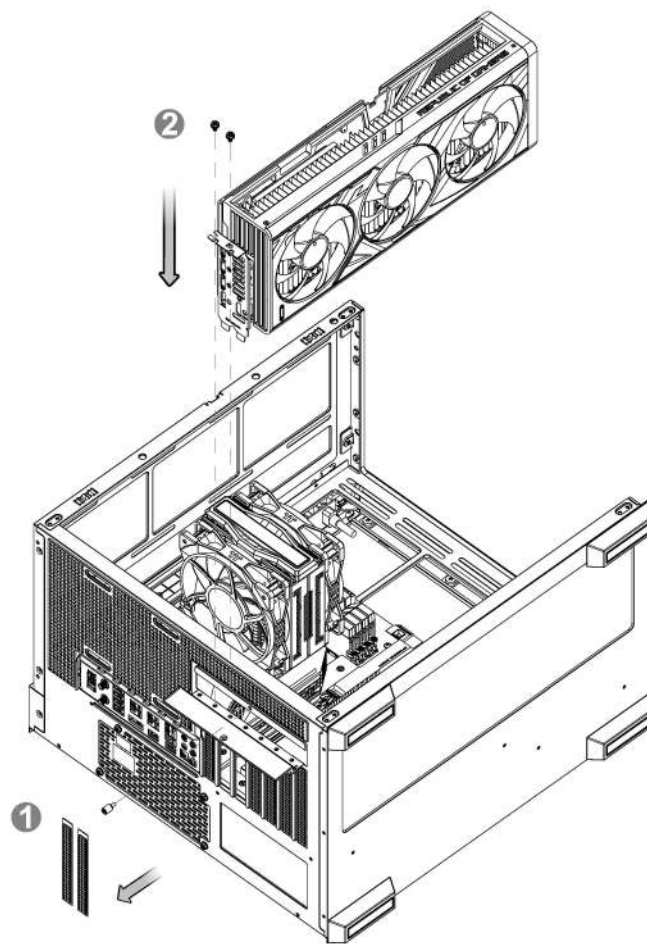
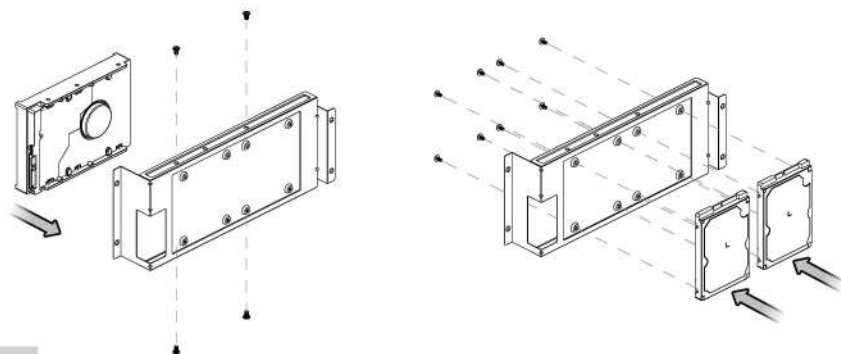
**3.5" HDD****x 4****2.5" SSD/HDD****x 8**

Top


120mm x 3

Rear

120mm x 1

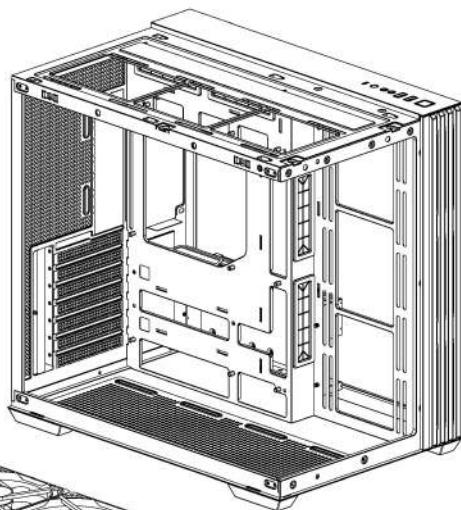M/B Side140mm x 2
or
120mm x 3**Bottom**




120mm x 3



**Top**

360mm x 1


Rear

120mm x 1

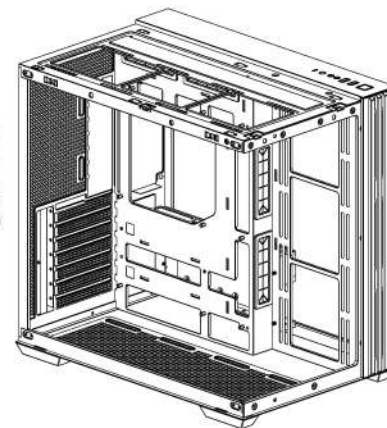M/B Side280mm x 1
or
240mm x 1

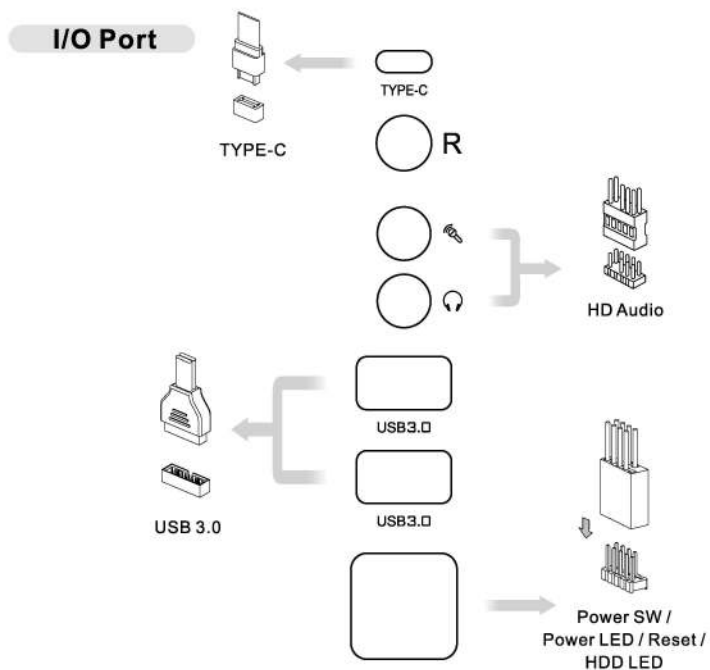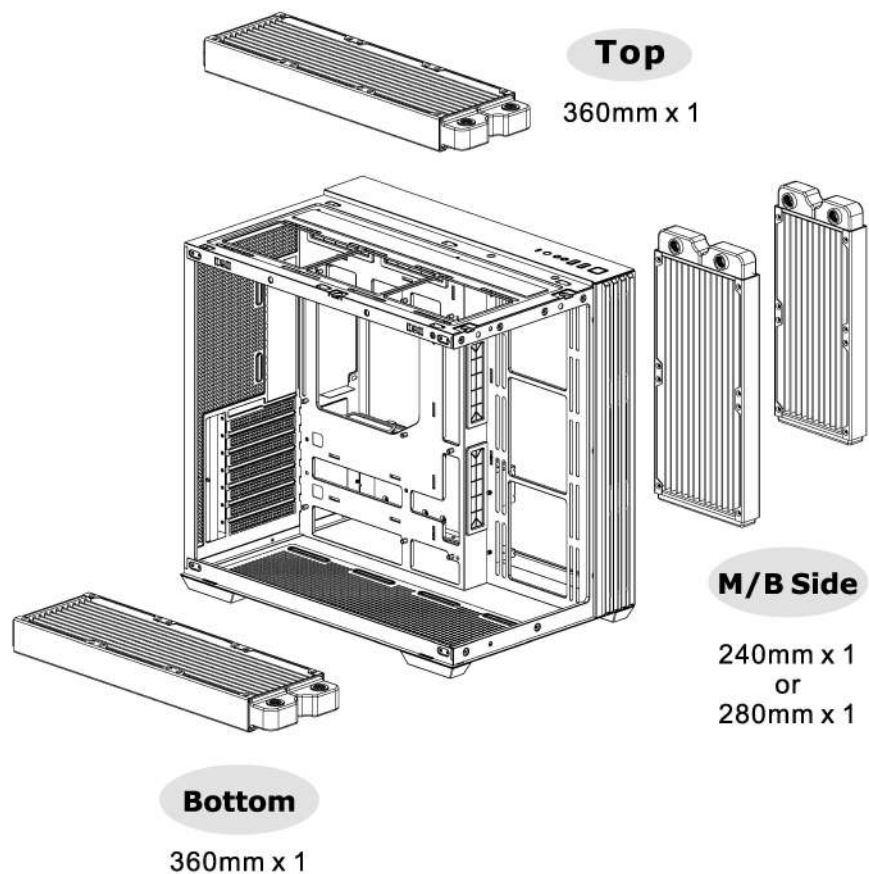

Motherboard Header Diagram

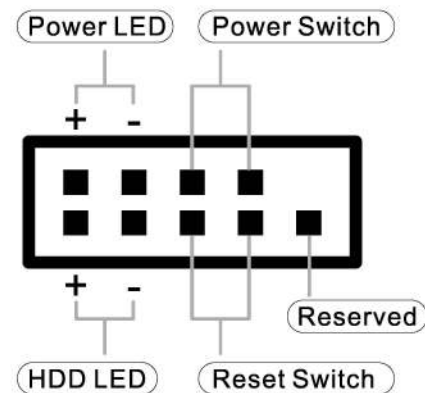

ARGB Control Instruction – How to connect MB

ASUS/ASRock/BIOSTAR

Aura Addressable Strip Header(s)



MSI

JRGB-strip Header(S)



GIGABYTE

AOURS RGB Fusion with Digital LEDs

