

## NETGEAR GS752TXP Managed L2/L3/L4 10G Ethernet (100/1000/10000) Power over Ethernet (PoE) Schwarz

Marke : NETGEAR


Artikel-Code: GS752TXP-300EUS

Produktname : GS752TXP



NETGEAR GS752TXP. Switch-Typ: Managed, Switch-Ebene: L2/L3/L4. Basic Switching RJ-45 Ethernet Ports-Typ: 10G Ethernet (100/1000/10000), Anzahl der basisschaltenden RJ-45 Ethernet Ports: 48. Vollduplex. MAC-Adressentabelle: 16000 Eintragungen. Netzstandard: IEEE 802.1ab, IEEE 802.1as, IEEE 802.1D, IEEE 802.1Q, IEEE 802.1s, IEEE 802.1w, IEEE 802.1x, IEEE.... Power over Ethernet (PoE). Rack-Einbau

| Management-Funktionen                              |                                                                                                                                                                            | Design                                            |              |
|----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|--------------|
| Switch-Typ *                                       | Managed                                                                                                                                                                    | Rack-Einbau *                                     | ✓            |
| Switch-Ebene                                       | L2/L3/L4                                                                                                                                                                   | Stapelbar *                                       | ✓            |
| Anschlüsse und Schnittstellen                      |                                                                                                                                                                            | Produktfarbe                                      | Schwarz      |
| Anzahl der basisschaltenden RJ-45 Ethernet Ports * | 48                                                                                                                                                                         | Leistungen                                        |              |
| Basic Switching RJ-45 Ethernet Ports-Typ *         | 10G Ethernet (100/1000/10000)                                                                                                                                              | Eingebauter Prozessor                             | ✓            |
| Menge Modul-Steckplätze SFP+                       | 4                                                                                                                                                                          | Flash-Speicher                                    | 64 MB        |
| Netzwerk                                           |                                                                                                                                                                            | Geräuschpegel                                     | 36,6 dB      |
|                                                    |                                                                                                                                                                            | Mittlere Betriebsdauer zwischen Ausfällen (MTBF)  | 1296949 h    |
| Netzstandard *                                     | IEEE 802.1ab, IEEE 802.1as, IEEE 802.1D, IEEE 802.1Q, IEEE 802.1s, IEEE 802.1w, IEEE 802.1x, IEEE 802.3, IEEE 802.3ab, IEEE 802.3ad, IEEE 802.3i, IEEE 802.3u, IEEE 802.3x | Energie                                           |              |
| 10G-Unterstützung *                                | ✓                                                                                                                                                                          | Energiequelle *                                   | AC           |
| Port-Spiegelung                                    | ✓                                                                                                                                                                          | Netzteil enthalten *                              | ✓            |
| Vollduplex                                         | ✓                                                                                                                                                                          | Stromverbrauch (max.)                             | 51 W         |
| Unterstützung Datenflusssteuerung                  | ✓                                                                                                                                                                          | Power over Ethernet (PoE)                         |              |
| Link Aggregation                                   | ✓                                                                                                                                                                          | Power over Ethernet (PoE) *                       | ✓            |
| Broadcast-Sturmkontrolle                           | ✓                                                                                                                                                                          | Anzahl Power over Ethernet plus (PoE+) Anschlüsse | 48           |
| Ratenbeschränkung                                  | ✓                                                                                                                                                                          | Gesamtleistung Power over Ethernet (PoE)          | 380 W        |
| Spannbaum-Protokoll                                | ✓                                                                                                                                                                          | Betriebsbedingungen                               |              |
| VLAN-Unterstützung                                 | ✓                                                                                                                                                                          | Betriebstemperatur                                | 0 - 50 °C    |
| Virtuelle LAN-Funktionen                           | Voice VLAN                                                                                                                                                                 | Temperaturbereich bei Lagerung                    | -20 - 70 °C  |
| Datenübertragung                                   |                                                                                                                                                                            | Relative Luftfeuchtigkeit in Betrieb              | 0 - 95%      |
| MAC-Adressentabelle *                              | 16000 Eintragungen                                                                                                                                                         | Luftfeuchtigkeit bei Lagerung                     | 0 - 95%      |
| Wartezeit (10 Gbps)                                | 4,107 µs                                                                                                                                                                   | Höhe bei Betrieb                                  | 0 - 3000 m   |
| Statische Route                                    | ✓                                                                                                                                                                          | Höhe bei Lagerung                                 | 0 - 3000 m   |
| Anzahl der statischen Routen                       | 32                                                                                                                                                                         | Wärmeableitung                                    | 2944,6 BTU/h |
| Datenpaket-Pufferspeicher                          | 16 MB                                                                                                                                                                      | Gewicht und Abmessungen                           |              |
| Sicherheit                                         |                                                                                                                                                                            | Breite                                            | 440 mm       |
| DHCP-Funktionen                                    | DHCP client                                                                                                                                                                | Tiefe                                             | 345 mm       |
| Zugriffskontrollliste                              | ✓                                                                                                                                                                          | Höhe                                              | 43 mm        |
| IGMP-Snooping                                      | ✓                                                                                                                                                                          | Gewicht                                           | 5,54 kg      |
| MAC Adressen Filtern                               | ✓                                                                                                                                                                          |                                                   |              |
| SSH-/SSL-Unterstützung                             | ✓                                                                                                                                                                          |                                                   |              |

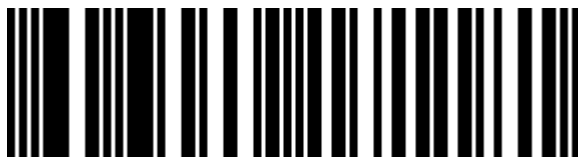

0606449171181



606449171181

### Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.