



APC SRTG6KXLI Unterbrechungsfreie Stromversorgung (USV) Doppelwandler (Online) 6 kVA 6000 W 3 AC-Ausgänge

Marke : APC

Artikel-Code: SRTG6KXLI


Produktname : SRTG6KXLI

APC SRTG6KXLI. USV-Topologie: Doppelwandler (Online), Ausgangskapazität: 6 kVA, Ausgangsleistung: 6000 W. AC-Steckertypen: C13-Koppler, C19-Koppler, Anzahl der AC-Ausgänge: 3 AC-Ausgänge. Akku-/Batterietechnologie: Plombierte Bleisäure (VRLA), Akku-/Batteriespannung: 96 V, Batterielebensdauer (max.): 5 Jahr(e). Formfaktor: Kompakt, Produktfarbe: Schwarz, Display-Typ: LCD. Zertifizierung: CE, EN/IEC 62040-1



Merkmale		Akku/Batterie	
USV-Topologie *	Doppelwandler (Online)	Batterielebensdauer (max.)	5 Jahr(e)
Ausgangskapazität *	6 kVA	Akkuladezeit	4 h
Ausgangsleistung *	6000 W	Hot-Swap-Batterie	✓
Wellenform *	Sine	Automatischer Batterietest	✓
Eingangs-Betriebsspannung (min) *	100 V	Kaltstart	✓
Eingangs-Betriebsspannung (max) *	285 V	Design	
Eingangsfrequenz *	40/70 Hz	Formfaktor *	Kompakt
Ausgangs-Betriebsspannung (min)	220 V	Produktfarbe *	Schwarz
Ausgangs-Betriebsspannung (max)	240 V	Display-Typ	LCD
Output Frequenz	50/60 Hz	LED-Anzeigen	✓
Anstieg der Energiemenge	600 J	Internationale Schutzart (IP-Code)	IP20
Crest-Faktor	3:1	Betriebsbedingungen	
ECO-Modus	✓	Betriebstemperatur	0 - 40 °C
Notstrom Aus (EPO)	✓	Temperaturbereich bei Lagerung	-15 - 45 °C
Ausgangsspannung	2%	Relative Luftfeuchtigkeit in Betrieb	0 - 95%
Gesamtverzerrungsfaktor THD	55 dB	Luftfeuchtigkeit bei Lagerung	0 - 95%
Geräuschpegel	✓	Höhe bei Betrieb	0 - 2011 m
Akustische Signale	Alarm bei Batteriebetrieb, Warnung bei geringer Batterie, Überlastungsalarm	Höhe bei Lagerung	0 - 15240 m
Akustische Alarm-Modi		Zertifikate	
Anschlüsse und Schnittstellen		Zertifizierung	CE, EN/IEC 62040-1
AC-Steckertypen	C13-Koppler, C19-Koppler	Lieferumfang	
Anzahl der AC-Ausgänge	3 AC-Ausgänge	Management-Karte enthalten	✓
USB Anschluss	✓	Gewicht und Abmessungen	
Serielle Schnittstelle	✓	Breite	440 mm
Anzahl Ethernet-LAN-Anschlüsse (RJ-45)	1	Tiefe	620 mm
Notaus-Steckverbinder (EPO)	✓	Höhe	178 mm

Anschlüsse und Schnittstellen		Gewicht und Abmessungen	
SmartSlot	✓	Gewicht	51,9 kg
SmartConnect-Anschluss	✗	Verpackungsdaten	
Akku/Batterie		Verpackungsbreite	590 mm
Akku-/Batterietechnologie	Plombierte Bleisäure (VRLA)	Verpackungstiefe	790 mm
Akku-/Batteriespannung	96 V	Verpackungshöhe	275 mm
		Paketgewicht	59 kg

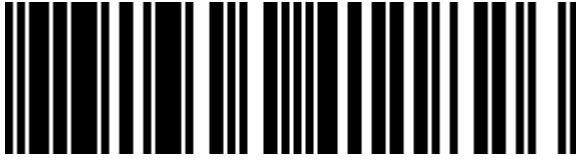

0731304411826



731304411826

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.