



APC Easy UPS On-Line, 3kVA/2700W, Tower, 230V, 6x IEC C13 + 1x IEC C19 Ausgänge, Intelligenter Kartensteckplatz, LCD, verlängerte Laufzeit


Marke : APC

Artikel-Code: SRV3KIL-E

Produktname : APC Easy UPS On-Line, 3kVA/2700W, Tower, 230V, 6x IEC C13 + 1x IEC C19 Ausgänge, Intelligenter Kartensteckplatz, LCD, verlängerte Laufzeit

APC Easy UPS On-Line, 3kVA/2700W, Tower, 230V, 6x IEC C13 + 1x IEC C19 Ausgänge, Intelligenter Kartensteckplatz, LCD, verlängerte Laufzeit
APC Easy UPS On-Line, 3kVA/2700W, Tower, 230V, 6x IEC C13 + 1x IEC C19 Ausgänge, Intelligenter Kartensteckplatz, LCD, verlängerte Laufzeit. Ausgangskapazität: 3 kVA, Ausgangsleistung: 2700 W, Wellenform: Sine. AC-Steckertypen: C13-Koppler, C19-Koppler, Stecker: C20-Koppler. Akku-/Batterietechnologie: Plombierte Bleisäure (VRLA), Akku-/Batteriespannung: 72 V, Akkuladezeit: 5,5 h. Produktfarbe: Schwarz, Internationale Schutzart (IP-Code): IP20. Breite: 425 mm, Tiefe: 425 mm, Höhe: 336 mm

Merkmale		Design	
Ausgangskapazität *	3 kVA	Produktfarbe *	Schwarz
Ausgangsleistung *	2700 W	Internationale Schutzart (IP-Code)	IP20
Wellenform *	Sine	Betriebsbedingungen	
Eingangs-Betriebsspannung (min) *	105 V	Betriebstemperatur	0 - 40 °C
Eingangs-Betriebsspannung (max) *	300 V	Temperaturbereich bei Lagerung	-20 - 50 °C
Eingangsfrequenz *	40 - 70 Hz	Relative Luftfeuchtigkeit in Betrieb	0 - 95%
Ausgangs-Betriebsspannung (min)	230 V	Luftfeuchtigkeit bei Lagerung	0 - 95%
Output Frequenz	50/60 Hz	Höhe bei Betrieb	0 - 3000 m
Anstieg der Energiemenge	600 J	Lieferumfang	
Reaktionszeit	4 ms	Management-Karte enthalten	✗
Wärmeableitung	910 BTU/h	Gewicht und Abmessungen	
Crest-Faktor	3:1	Breite	425 mm
Geräuschpegel	50 dB	Tiefe	425 mm
Anschlüsse und Schnittstellen		Höhe	336 mm
AC-Steckertypen	C13-Koppler, C19-Koppler	Gewicht	46,2 kg
Stecker	C20-Koppler	Verpackungsdaten	
USB Anschluss	✓	Verpackungsbreite	565 mm
SmartSlot	✓	Verpackungstiefe	565 mm
SmartConnect-Anschluss	✗	Verpackungshöhe	465 mm
Akku/Batterie		Paketgewicht	49,9 kg
Akku-/Batterietechnologie	Plombierte Bleisäure (VRLA)	Logistikdaten	
Akku-/Batteriespannung	72 V	Garantiezeit	2 Jahr(e)
Akkuladezeit	5,5 h		

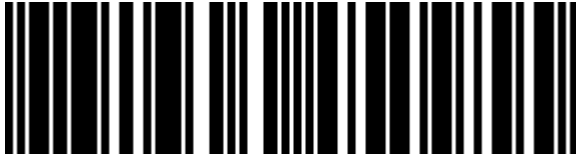

0731304450955



731304450955



8592978637514

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.