


## INLINE® PATCHKABEL, CAT.6A, S/FTP, PUR INDUSTRIAL

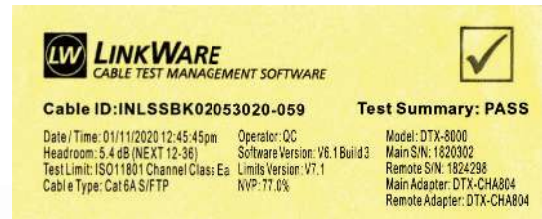


- Cat.6A Patchkabel
- S/FTP (PiMf) Schirmung, paarweise foliengeschirmt mit Geflecht-Gesamtschirm
- Kabel mit PUR-Mantel, halogenfrei
- Unempfindlich gegenüber Ölen, werkstattgeeignet
- Schleppkettentauglich, für industrielle Umgebungen

- RJ45 Stecker beidseitig, mit blau-transparent eingefärbtem Kunststoff
- vergoldete Kontakte, mind. 750 Steckzyklen geeignet
- 4x2xAWG26 Vollkupfer-Litzen
- Belegung 1:1, nach T568B
- im PE-Beutel mit EAN-Code

| Technische Daten      |                     |
|-----------------------|---------------------|
| Hersteller            | InLine®             |
| Kategorie             | Kabel               |
| Farbe                 | Schwarz             |
| Seite A               | RJ45 Stecker gerade |
| Seite B               | RJ45 Stecker gerade |
| Schirmung             | S/FTP (PiMf)        |
| Typ                   | Cat.6A              |
| Signal                | Netzwerk            |
| Querschnitt           | AWG 26              |
| Außendurchmesser      | 6,2 mm              |
| UL                    | Nein                |
| NVP-Wert              | 77 %                |
| Datenübertragungsrate | 10 Gb/s             |
| PoE/PoE+/PoE++        | Ja                  |
| Bauweise              | Rundkabel           |
| Betriebstemperatur    | -30 bis +90 °C      |
| Verpackung            | Retail              |
| Leitermaterial        | CU (Kupfer)         |
| Mantel                | PUR                 |
| Belegung              | 1:1                 |
| Patchkabel-Kategorie  | Cat.6A              |

| Art. Nr. | Länge  | EAN           |
|----------|--------|---------------|
| 73855S   | 0,50 m | 4043718259748 |
| 73801S   | 1 m    | 4043718259687 |
| 73814S   | 1,50 m | 4043718259731 |
| 73802S   | 2 m    | 4043718259694 |
| 73803S   | 3 m    | 4043718259700 |
| 73805S   | 5 m    | 4043718259717 |
| 73807S   | 7,50 m | 4043718259724 |
| 73800S   | 10 m   | 4043718259670 |
| 73815S   | 15 m   | 4043718259755 |
| 73820S   | 20 m   | 4043718259762 |
| 73825S   | 25 m   | 4043718282814 |
| 73830S   | 30 m   | 4043718282821 |
| 73840S   | 40 m   | 4043718282838 |
| 73850S   | 50 m   | 4043718282845 |

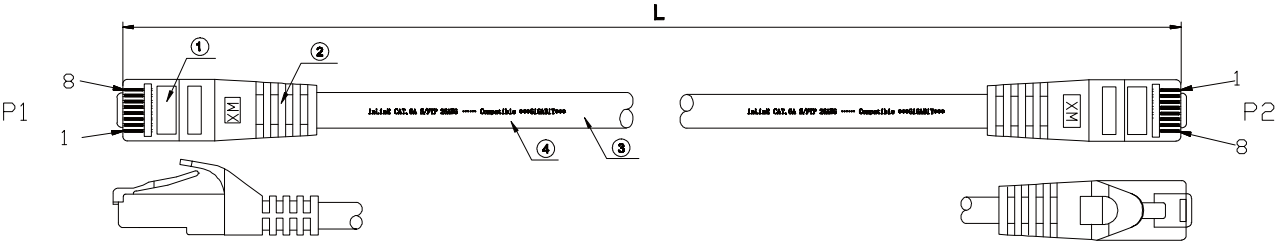

|     |           |                                                                                                                        |       |        |
|-----|-----------|------------------------------------------------------------------------------------------------------------------------|-------|--------|
| ⑤   | PACKAGE   | InLine PE SELF SEALING BAG                                                                                             | 1     | PCS    |
| ④   | PRINTING  | InLinE CAT.6A S/FTP 26AWG PUR 500MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2 Drag Chain Compatible ***GIGABIT*** |       |        |
| ③   | CABLE     | S/FTP CAT.6A (26AWG BC*1P+AL-FOIL)*4PAIR+Braid AL-MG+CABLE<br>JACKET: PUR, OD: 6.2 ± 0.2MM                             | 1     | PCS    |
| ②   | MOLD HOOD | PVC, 75A                                                                                                               | 2     | PCS    |
| ①   | CONNECTOR | RJ45 8P8C PIN GOLD PLATED 3U", THE SHELL PLATED NICKEL,<br>COLOR: TRANSPARENT BLUE                                     | 2     | PCS    |
| No. | PARTSNAME | SPECIFICATION STANDARD                                                                                                 | QT' Y | REMARK |

NOTE:

1. ELECTRICAL TEST: 100% OPEN SHORT, MISS WIRE TEST
2. TEST LIMIT: Fluke ISO 11801 channel Class Ea PASS
3. operating temperature, fixed: -40 ~ +90 °C  
temperature, moved/during installation: -30 ~ +90 °C  
bending radius, fixed installation: 5xOD  
bending radius, moved application: 7.5xOD ≤ 10M, 10xOD > 10M  
operating capacity: 56 nF/km  
test voltage: 2500V
4. Plug Contacts durability: 750 cycles min
5. ROHS2.0 AND REACH COMPLIANT
6. Chemical properties:  
Conform IEC 60754-2,  
IEC 61034,  
IEC 60754,  
EN60811-2-1

PIN OUT (568B-568B)

|       |        |       |        |
|-------|--------|-------|--------|
| P1    |        | P2    |        |
| 1     | WHITE  | 1     | WHITE  |
| 2     | ORANGE | 2     | ORANGE |
| 3     | WHITE  | 3     | WHITE  |
| 6     | GREEN  | 6     | GREEN  |
| 4     | BLUE   | 4     | BLUE   |
| 5     | WHITE  | 5     | WHITE  |
| 7     | WHITE  | 7     | WHITE  |
| 8     | BROWN  | 8     | BROWN  |
| SHELL | BRAID  | SHELL |        |

Angabe der Kabellänge  
Indicator of cable length

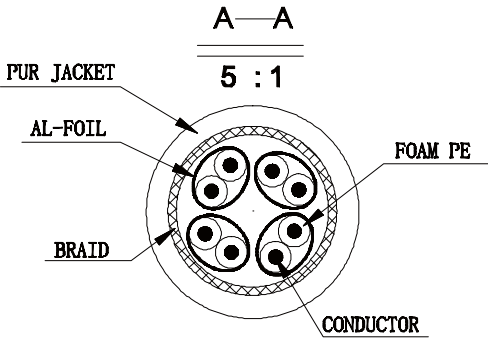


ABBILDUNG ÄHNLICH  
IMAGE SIMILAR