
Delock Adapter U.2 SFF-8639 > PCIe x4 with fixing plate

Description

This adapter by Delock can be connected via U.2 interface to the system and provides a PCI Express x4 NVMe slot. To this slot it can be connected e.g. PCI Express cards with M.2 slot for M.2 PCIe modules.

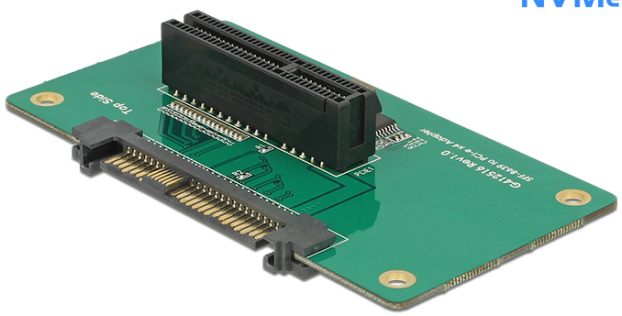

Specification

- Connectors:
  1 x U.2 SFF-8639 male >
  1 x PCI Express x4, V3.0
- Bootable, from UEFI version 2.3.1
- Supports NVM Express (NVMe)
- Maximum output current: 4 A
- Output voltage: 3.3 V
- Short circuit protection, over heating protection
- ESD protection up to 2 kV
- Dimensions (LxWxH):
  adapter: ca. 85 x 45 x 15 mm
  fixing plate: ca. 95 x 70 x 10 mm

System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux Kernel 3.20
- A free U.2 SFF-8639 interface

Package content

- Adapter
- Fixing plate
- Screws and spacer
- User manual

Item No. 62863

EAN: 4043619628636

Country of origin: Taiwan, Republic of China

Package: Retail Box




© 2017 by Delock. All names and symbols mentioned here are property of the respective producer. Printing errors, changes and errors excepted.


Images














© 2017 by Delock. All names and symbols mentioned here are property of the respective producer. Printing errors, changes and errors excepted.

General	
function:	NVM Express (NVMe)
	Bootable, ex UEFI version 2.3.1
Supported operating system:	Linux ex Kernel 3.2
	Windows 7 32-bit
	Windows 7 64-bit
	Windows 8.1 32-bit
	Windows 8.1 64-bit
	Windows 10 32-bit
	Windows 10 64-bit
Protection:	ESD (Electrostatic Discharge)
	Short circuit protection
	Overheating protection
Interface	
connector 1:	1 x U.2 SFF-8639 male
connector 2:	1 x PCI Express x4, V3.0
Technical characteristics	
Voltage:	3.3 V output current

© 2017 by Delock. All names and symbols mentioned here are property of the respective producer. Printing errors, changes and errors excepted.