
Manual Heart RAID 3722 series

2+2 bay RAID enclosure for 2x 2.5"/3.5" drives and
2x NVMe with software RAID

Handbuch Heart RAID 3722 Serie

2+2-Bay RAID-Gehäuse für 2,5"/3,5" Laufwerke und
2x NVMe mit Software-RAID

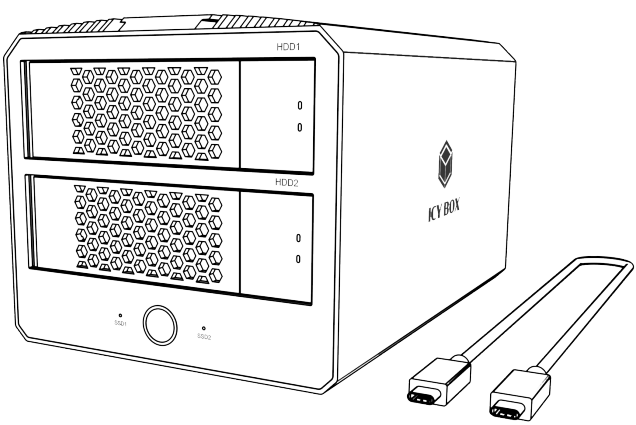

Content

2 - 3 ..... Safety information

4 - 5 ..... Sicherheitshinweise

6 - 21 ..... Manual english

22 - 37 ..... Handbuch deutsch

Manual Heart RAID 3722 series

Please read carefully the following information to prevent injuries, damage to material and device as well as data loss:

Warning levels
Signal words and safety codes indicate the warning level and provide immediate information in terms of the probability of occurrence as well as the type and severity of the consequences if the measures to prevent hazards are not complied with.

DANGER	Warns of a **directly** hazardous situation causing **death or serious injury**.
WARNING	Warns of a **potentially** hazardous situation that **may** cause death or serious injury.
CAUTION	Warns of a **potentially** hazardous situation that **may** cause minor injury.
IMPORTANT	Warns of a **potential** situation that **may** cause material or environmental damage and disrupt operative processes.

1. Risk of electrical shock

WARNING **Contact with parts conducting electricity**
Risk of death by electrical shock

- Read the operating instructions prior to use
- Make sure the device has been de-energised prior to working on it
- Do not remove contact protection panels
- Avoid contact with conducting parts
- Do not bring plug contacts in contact with pointed and metal objects
- Use in intended environments only
- Operate the device using a power unit meeting the specifications of the type plate only!
- Keep the device/power unit away from humidity, liquid, vapour and dust
- Do not modify the device
- Do not connect the device during thunderstorms
- Approach specialist retailers if you require repairs

2. Hazards during assembly (if intended)

CAUTION **Sharp components**
Potential injuries to fingers or hands during assembly (if intended)

- Read the operating instructions prior to assembly
- Avoid coming into contact with sharp edges or pointed components
- Do not force components together
- Use suitable tools
- Use potentially enclosed accessories and tools only

3. Hazards caused by a development of heat

IMPORTANT

Insufficient device/power unit ventilation
Overheating and failure of the device/power unit

- Prevent externally heating up components and ensure an exchange of air
- Do not cover the fan outlet and passive cooling elements
- Avoid direct sunlight on the device/power unit
- Guarantee sufficient ambient air for the device/power unit
- Do not place objects on the device/power unit

4. Hazards caused by very small parts and packaging

⚠ WARNING

Risk of suffocation
Risk of death by suffocation or swallowing

- Keep small parts and accessories away from children
- Store/dispose of plastic bags and packaging in an area that is inaccessible to children
- Do not hand over small parts and packaging to children

5. Potential data loss

IMPORTANT

Data lost during commissioning
Potentially irreversible data loss

- Always comply with the information in the operating instructions/quick installation guide
- Exclusively use the product once the specifications have been met
- Back up data prior to commissioning
- Back up data prior to connecting new hardware
- Use accessories enclosed with the product

6. Cleaning the device

IMPORTANT


Harmful cleaning agents
Scratches, discolouration, damage caused by moisture or short circuit in the device

- Disconnect the device prior to cleaning
- Aggressive or intense cleaning agents and solvents are unsuitable
- Make sure there is no residual moisture after cleaning
- We recommend cleaning devices using a dry, anti-static cloth

7. Disposing of the device

IMPORTANT

Environmental pollution, unsuitable for recycling
Potential environmental pollution caused by components, recycling circle interrupted



This icon on product and packaging indicates that this product must not be disposed of as part of domestic waste. In compliance with the Waste Electrical and Electronic Equipment Directive (**WEEE**) this electrical device and potentially included batteries must not be disposed of in conventional, domestic waste or **recycling waste**. If you would like to dispose of this product and potentially included batteries, please return it to the retailer or your local waste disposal and recycling point.

If you have any questions, please do not hesitate to contact our support at **support@raidsonic.de** or visit our website at **www.icybox.de**.

D

Handbuch Heart RAID 3722 Serie

Zur Vermeidung von Personenschäden sowie Sach-, Geräte- und Datenverlust beachte bitte die folgenden Hinweise:

Warnstufen
Signalwort und Sicherheitszeichen kennzeichnen die jeweilige Warnstufe und geben dir einen unmittelbaren Hinweis auf Wahrscheinlichkeit, Art und Schwere der Folgen, wenn du die Maßnahmen zur Gefahrenvermeidung nicht einhältst.

⚠ GEFAHR warnt vor einer **unmittelbar** gefährlichen Situation, die zum Tod oder zu schweren Verletzungen führen **wird**.

⚠ WARNUNG warnt vor einer **möglicherweise** gefährlichen Situation, die zum Tod oder zu schweren Verletzungen führen **kann**.

⚠ VORSICHT warnt vor einer **möglicherweise** gefährlichen Situation, die zu leichten Verletzungen führen **kann**.

ACHTUNG warnt vor einer **möglichen** Situation, die zu Sach- und Umweltschäden führen und den Betriebsablauf stören **kann**.

1. Gefahren durch elektrische Spannung

⚠ WARNUNG **Kontakt mit elektrisch leitenden Teilen**
Lebensgefahr durch Stromschlag

- vor Benutzung Betriebsanleitung lesen
- vor Arbeiten am Gerät, Spannungsfreiheit sicherstellen
- Kontaktschutzblenden nicht entfernen
- Kontakt mit Spannungsführenden Komponenten vermeiden.
- Steckkontakte nicht mit spitzen und metallischen Gegenständen berühren
- Verwendung nur in dafür vorgesehenen Umgebungen
- Gerät ausschließlich mit Typenschildkonformen Netzteil betreiben!
- Gerät/Netzteil fern von Feuchtigkeit, Flüssigkeit, Dampf und Staub halten
- Eigenständige Modifikationen sind unzulässig
- Gerät nicht während eines Gewitters anschließen
- Gib dein Gerät im Reparaturfall in den Fachhandel

2. Gefahren während Montage (wenn vorgesehen)

⚠ VORSICHT **Scharfkantige Bauteile**
Finger- oder Handverletzungen bei Zusammenbau (wenn vorgesehen) möglich

- vor Montage, Betriebsanleitung lesen
- Kontakt mit scharfen Kanten oder spitzen Bauteilen vermeiden
- Bauteile nicht mit Gewalt zusammensetzen
- geeignetes Werkzeug verwenden
- nur gegebenenfalls mitgeliefertes Zubehör und Werkzeug verwenden

3. Gefahren durch Wärmeentwicklung

ACHTUNG **Mangelhafte Belüftung des Geräts/Netzteils**
Überhitzung und Ausfall des Geräts/Netzteils

- externe Erwärmung vermeiden und Luftaustausch zulassen
- Lüfter-Auslass und passive Kühlkörper freihalten
- direkte Sonneneinstrahlung auf Gerät/Netzteil vermeiden
- ausreichend Umgebungsluft für Gerät/Netzteil sicherstellen
- keine Gegenstände auf dem Gerät/Netzteil abstellen

4. Gefahren durch Kleinstteile und Verpackung

⚠ WARNUNG **Erstickungsgefahr**
Lebensgefahr durch Ersticken oder Verschlucken

- Kleinteile, Zubehör für Kinder unzugänglich verwahren
- Plastiktüten und Verpackung für Kinder unzugänglich verwahren/entsorgen
- Kleinteile und Verpackungen nicht in Kinderhände geben

5. Möglicher Datenverlust

ACHTUNG **Datenverlust bei Inbetriebnahme**
Unwiederbringlicher Datenverlust möglich

- Unbedingt Hinweise in der Bedienungsanleitung/Schnellinstallationsanleitung beachten
- Produkt nur verwenden, wenn Spezifikationen erfüllt sind
- Datensicherung vor Inbetriebnahme durchführen
- Datensicherung vor Anschluss neuer Hardware durchführen
- dem Produkt beiliegendes Zubehör verwenden

6. Reinigung des Gerätes


ACHTUNG **Schädigende Reinigungsmittel**
Kratzer, Farbveränderungen, Feuchteschäden oder Kurzschluss am Gerät

- vor Reinigung, das Gerät außer Betrieb nehmen
- aggressive bzw. scharfe Reinigungs- und Lösungsmittel sind ungeeignet
- nach der Reinigung sicherstellen, dass keine Restfeuchtigkeit vorhanden ist
- Reinigung der Geräte am besten mit trockenem Antistatiktuch durchführen

7. Entsorgung des Gerätes

Umweltverschmutzung, Wiederverwertung nicht möglich

ACHTUNG Mögliche Umweltbelastung durch Bestandteile, Recyclingkreislauf unterbrochen



Dieses auf dem Produkt und der Verpackung angebrachte Symbol zeigt an, dass dieses Produkt nicht mit dem Hausmüll entsorgt werden darf. In Übereinstimmung mit der Richtlinie über Elektro- und Elektronik-Altgeräte (**WEEE**) darf dieses Elektrogerät und ggf. enthaltene Batterien nicht im normalen Hausmüll oder dem **Gelben Sack** entsorgt werden. Wenn du dieses Produkt und ggf. enthaltene Batterien entsorgen möchtest, bringe diese bitte zur Verkaufsstelle zurück oder zum Recycling-Sammelpunkt deiner Gemeinde.

Bei Fragen kontaktiere gerne unseren Support unter **support@raidsonic.de** oder besuche unsere Internetseite **www.icybox.de**.

E

ICY BOX

Manual Heart RAID 3722 series

Package content

1x IB-RD3722
4x Rubber fixation
1x Tool for RAID switch
1x Screw driver
4x Heat sink
14x Screw
1x USB Type-C® to Type-C® cable, 100 cm
1x Power adapter 12 V/8 A (DC plug: 5.5x2.1xL 10 mm)
1x AC power cord, 120 cm
1x Manual


System requirements

Windows®, macOS®, Linux®

Legacy USB standards	Current USB standards	Data transfer rate
USB 3.0 = USB 3.1 (Gen 1)	**= USB 3.2 Gen 1**	**= 5 Gbps**
USB 3.1 = USB 3.1 (Gen 2)	**= USB 3.2 Gen 2**	**= 10 Gbps**
USB 3.2 (Gen 2x2)	**= USB 3.2 Gen 2x2**	**= 20 Gbps**
	= USB4® Gen 2x1	**= 10 Gbps**
	= USB4® Gen 2x2	**= 20 Gbps**
	= USB4® Gen 3x2	**= 40 Gbps**

Manual Heart RAID 3722 series

Overview

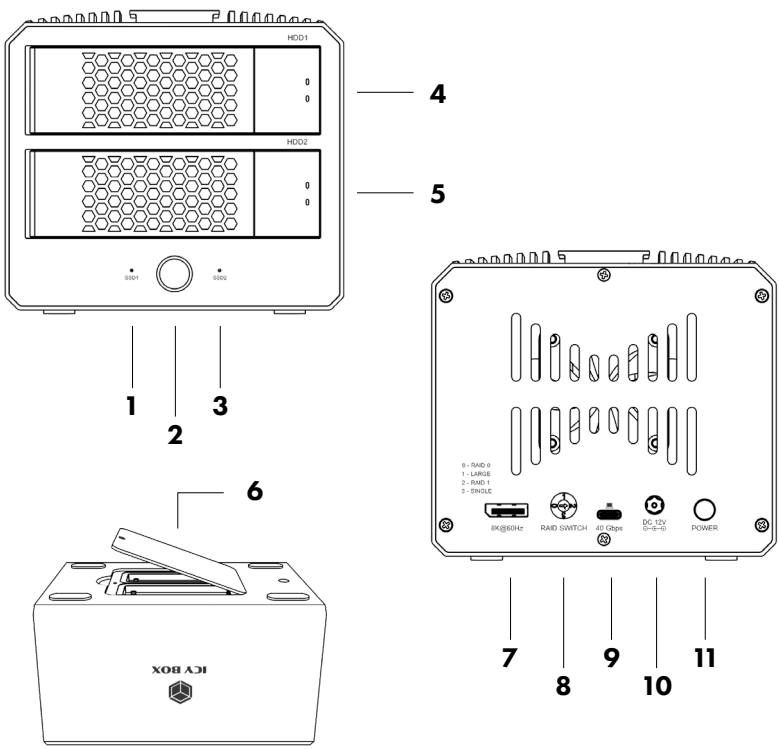

1. LED for SSD 1
2. LED for power
3. LED for SSD 2
4. LED for HDD 1
5. LED for HDD 2
6. 2x M.2 NVMe bays
7. DP port
8. RAID switch
9. USB4® host port
10. 12 V/8 A power outlet
11. On/Off button

Manual Heart RAID 3722 series

Key features

- Simultaneous reading of 2x 2.5"/3.5" SATA drives and 2x M.2 NVMe SSD
- Suitable for M.2 NVMe SSD: 2230/2242/2260/2280, M-Key and B+M-Key
- USB4® host port, compatible with Thunderbolt™ 3/4/5, up to 40 Gbps for RAID 0, up to 20 Gbps for M.2 SSD, and up to 6 Gbps for 3.5"/2.5" hard drives
- RAID modes support 0/1/Single/Large via switch with tool
- 1x DisplayPort connection with a resolution of up to 8K@60 Hz
- LED display for power supply and drive status
- HotSwap and Plug & Play
- 12 V/8 A power supply and power cable included


Note


- Only 2.5"/3.5" drives support hardware RAID.
  M.2 drives do not support hardware RAID and only support software RAID
- A magnet located on the bottom of the device holds the RAID switch tool
- When replacing a failed disk, ensure the new hard disk has an actual capacity greater than or equal to the failed disk.
- Back up your data before configuring RAID, as the setup process will reset the drives.
- After RAID mode is configured, initialize the disk before use.

Installation and operation guide

3.5" Hard drive installation


1. Press the hard disk tray opening button and pull out the hard disk tray

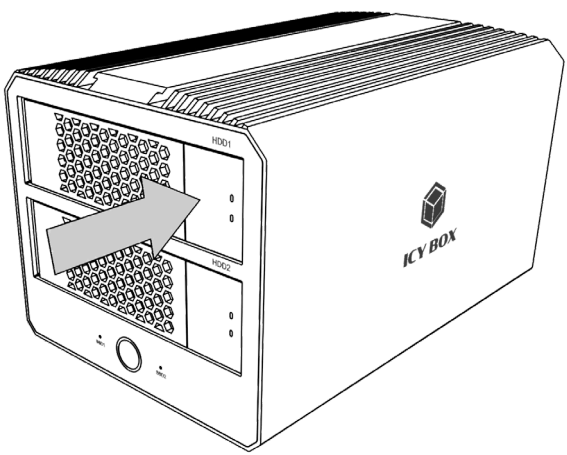

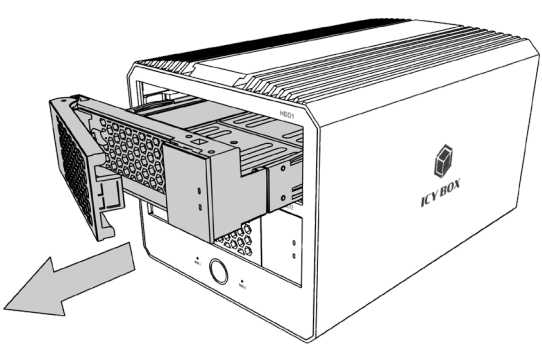



Manual Heart RAID 3722 series

2. Rotate to open the tray side fixing bar

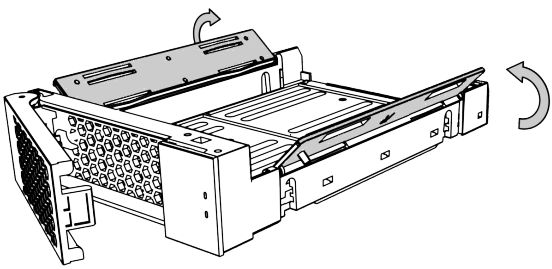


3. Insert the hard disk, align it with the frames on both sides, and lock the hard disk

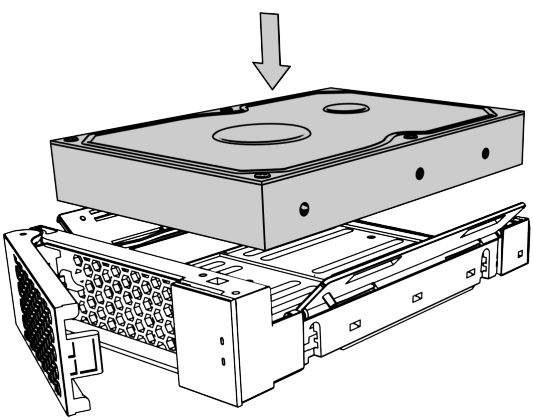

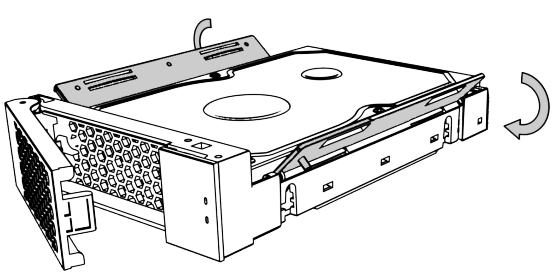


4. Push the tray with hard disk back into the enclosure

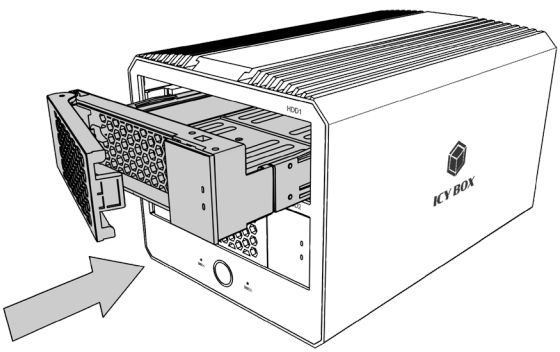


2.5" Hard Drive installation


1. Flip the tray upside down, unscrew and remove the cover

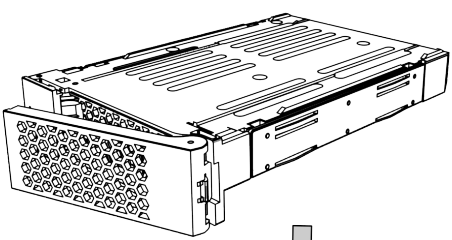


2. Place the 2.5" hard drive and screw the cover back on

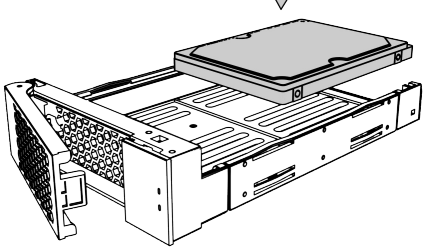

2. Align the four screw holes on the hard drive with those on the tray, tighten the screws to secure the hard drive.

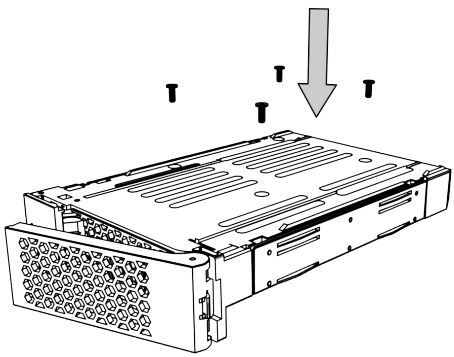


3. Turn the tray back over and slide it into the enclosure

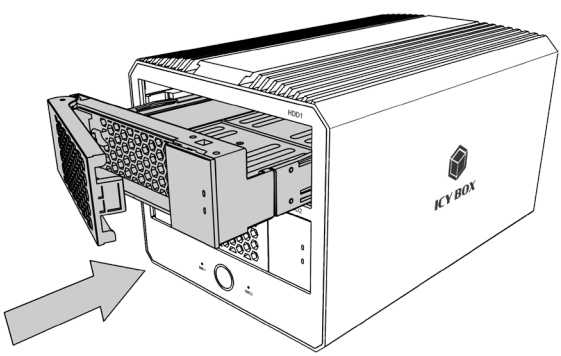


M.2 SSD installation

1. Turn the entire case upside down and remove the cover of the compartment

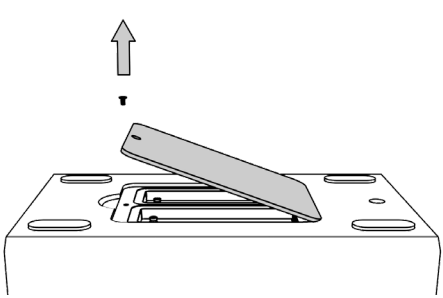


2. Insert one or two M.2 SSDs, attach thermal pads, then place the rubber fixation

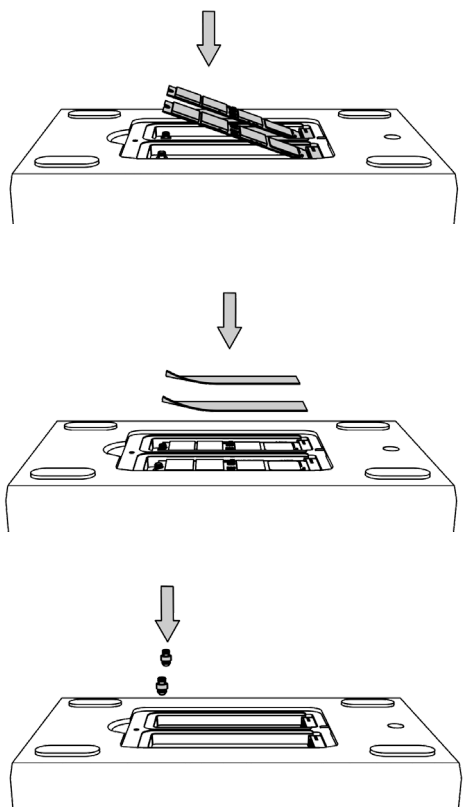


3. Replace the bottom compartment cover and tighten the screws

RAID mode description


RAID settings
Select the RAID mode you prefer based on the "RAID Modes & DIP Switch" table, use the tool to adjust the RAID DIP switches.

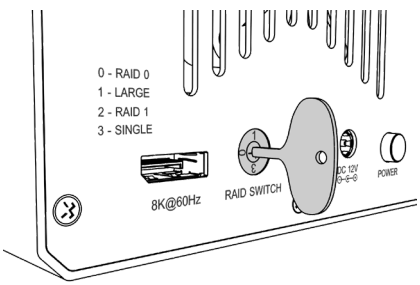



RAID 0
Defines twice the capacity of the smaller hard disk and recognizes them as one hard disks.


Set the RAID switch to position 0



RAID 1
Identifies the smaller hard disk and mirrors the data to the second drive.


Set the RAID switch to position 2.

Manual Heart RAID 3722 series



SINGLE
Identifies both hard drives as independent from each other.


Set the RAID switch to position 3.



LARGE
Identifies the capacity of both hard drives and recognizes one hard drive as the sum of both.

Set the RAID switch to position 1.


Tip
*The DIP switch tool adheres magnetically to the underside of the device.

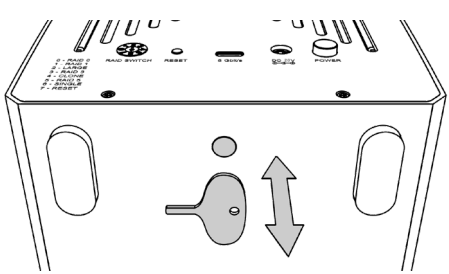


Product operation

1. First insert your 2.5"/3.5" hard drive and/or M.2 SSDs

2. Connect the RAID enclosure by connecting the data cable to the computer and connecting the power supply.

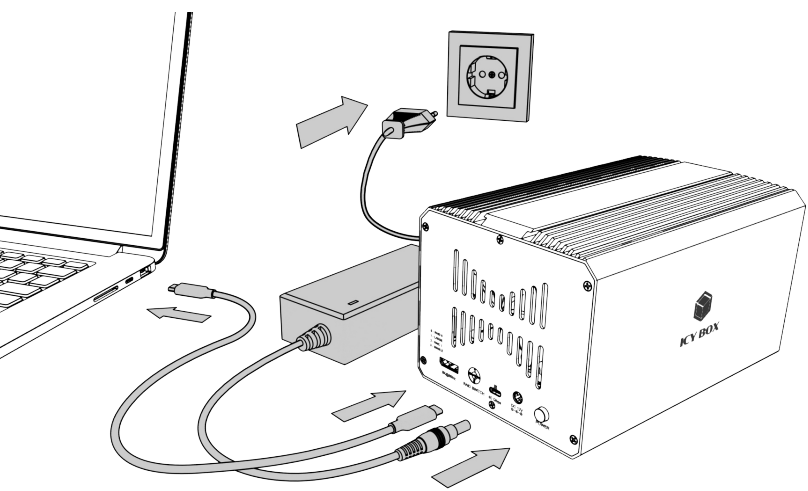

3. Press the On/Off button to switch on the device.

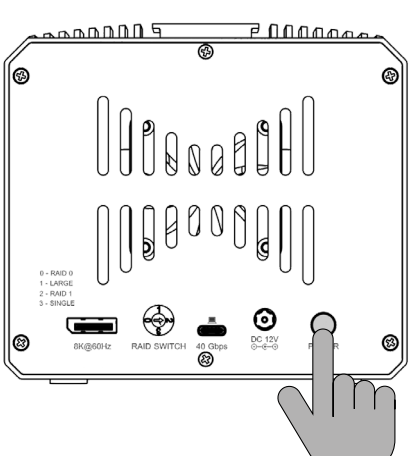



RAID mode operation guide


For Windows®

RAID

1. Select the disk, right click and choose convert to "Dynamic Disk".
2. Add RAID operation

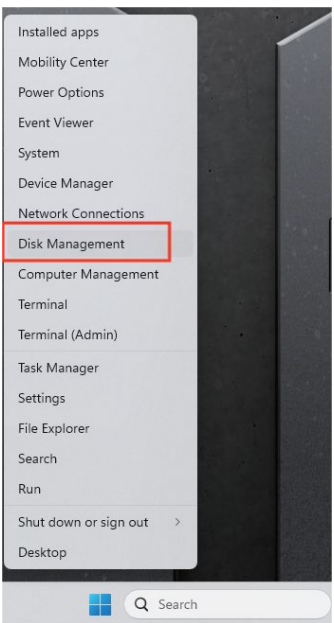

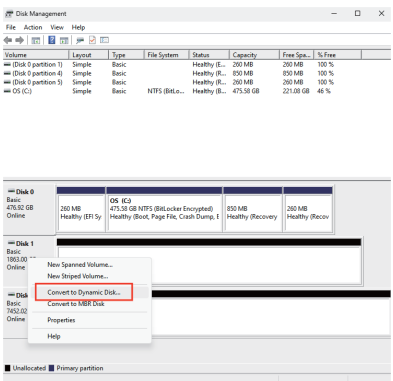


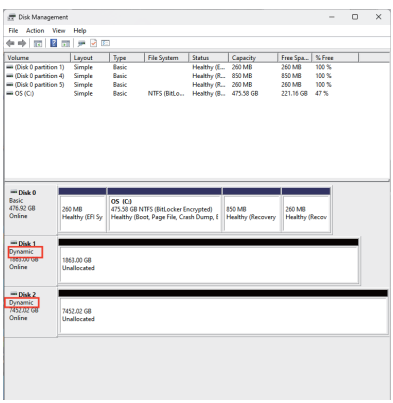

Manual Heart RAID 3722 series


Mirroring

In Disk Management, right-click the unallocated volume and select New Mirrored Volume. Click Next, select the corresponding disk, and click Add. Confirm the selection, click Next, keep the default settings, and then click Finish.

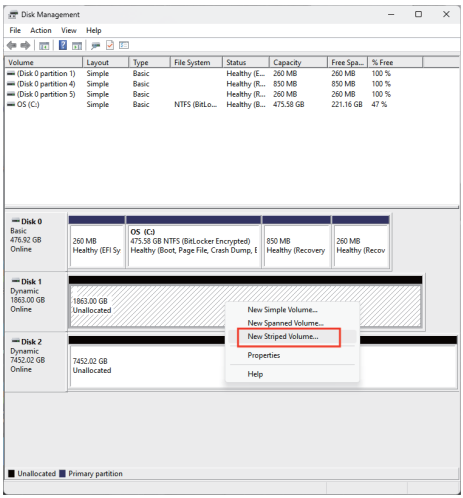

Spanning

Right-click the newly added unallocated volume in Disk Management and select New Spanned Volume. Click Next, select the appropriate disk, and click Add. After confirming the disk selection, click Next. On the next page, keep the default settings and click Finish.

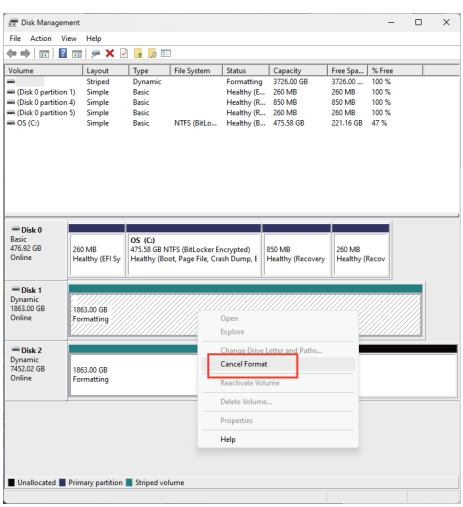

Note

Note: After completing the settings, click "Yes" to confirm. The system will begin formatting the hard drive and creating the RAID volume. Please wait until the process is complete.

If you want to cancel the RAID group, right-click on the volume and select "Cancel Mirrored Volume" or "Cancel."

Note


Creating a RAID group can take a long time in Windows®. Leave your computer on until the RAID creation process is complete.

RAID groups are system-specific. For example, a RAID group created in macOS® may not be recognized in Windows®, and vice versa.


Manual Heart RAID 3722 series

For macOS®


1. Open Disk Utility. Select File RAID Assistant from the menu bar.

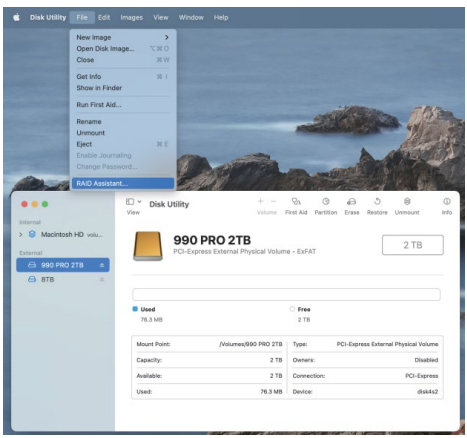


2. Select the desired RAID mode.

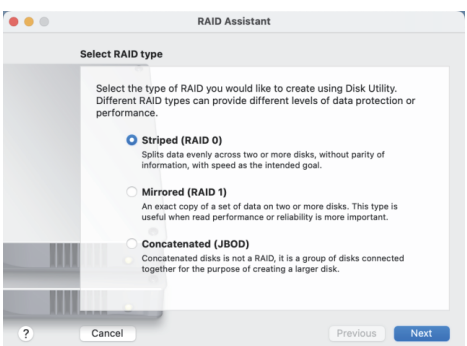


Manual Heart RAID 3722 series

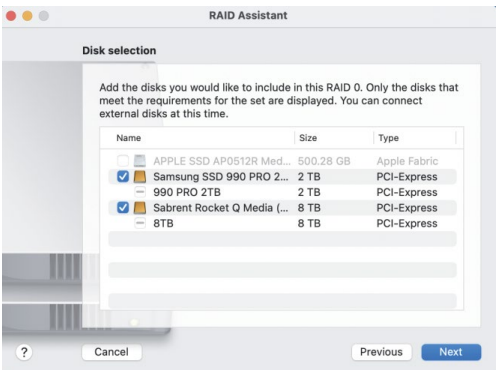

3. Select the hard drives to be included in the RAID array.

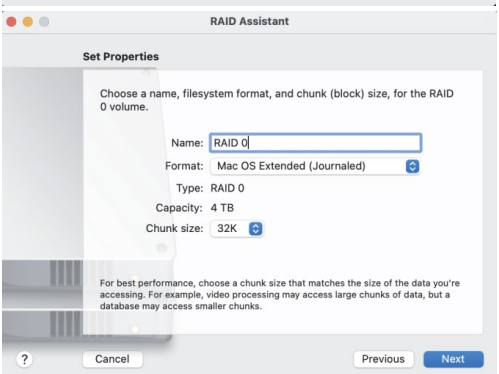

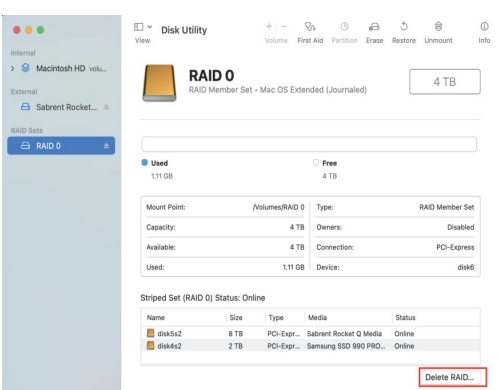

4. To delete a RAID group, select the RAID drives in the group and click "Delete RAID" in the lower right corner.

Verpackungsinhalt


1x IB-RD3722
4x Gummifixierung
1x Werkzeug für RAID-Schalter
1x Schraubendreher
4x Kühlkörper
14x Schraube
1x USB Type-C® zu Type-C® Kabel, 100 cm
1x Netzteil 12 V/8 A (DC-Stecker: 5,5 x 2,1 x L 10 mm)
1x Netzkabel, 120 cm
1x Handbuch

Systemanforderungen
Windows®, macOS®, Linux®

Legacy USB standards	Current USB standards	Data transfer rate
USB 3.0 = USB 3.1 (Gen 1)	**= USB 3.2 Gen 1**	**= 5 Gbps**
USB 3.1 = USB 3.1 (Gen 2)	**= USB 3.2 Gen 2**	**= 10 Gbps**
USB 3.2 (Gen 2x2)	**= USB 3.2 Gen 2x2**	**= 20 Gbps**
	= USB4® Gen 2x1	**= 10 Gbps**
	= USB4® Gen 2x2	**= 20 Gbps**
	= USB4® Gen 3x2	**= 40 Gbps**

Handbuch Heart RAID 3722 Serie

Ansicht

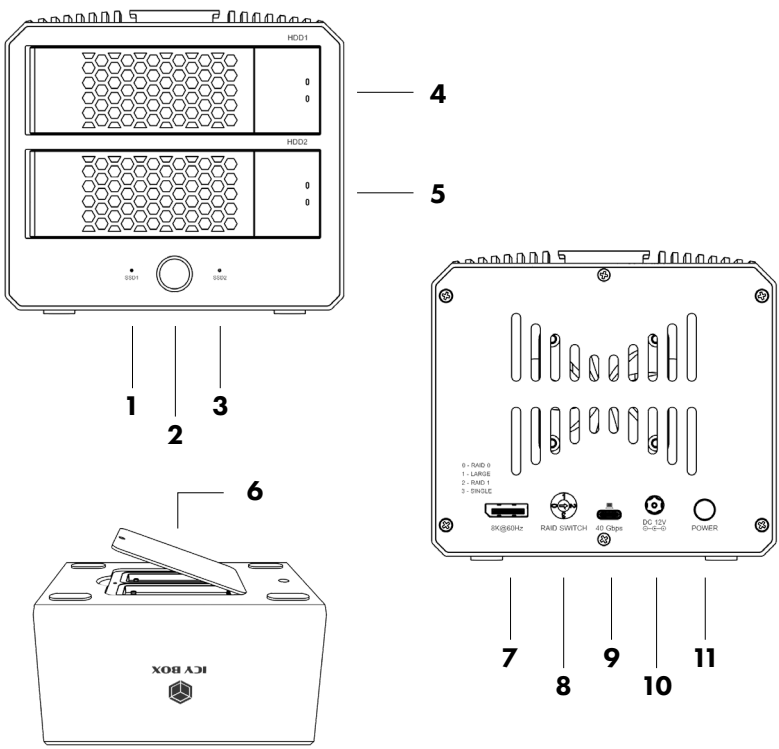

1. LED für SSD 1
2. LED für Stromversorgung
3. LED für SSD 2
4. LED für HDD 1
5. LED für HDD 2
6. 2x M.2 NVMe SSD Steckplatz
7. DP-Anschluss
8. RAID-Schalter
9. USB4® Hostanschluss
10. 12 V/8 A-Stromanschluss
11. Ein-/Aus Taste

D

ICY BOX

Handbuch Heart RAID 3722 Serie

Hauptmerkmale

- Gleichzeitiges Lesen von 2x 2,5"/3,5" SATA Laufwerk und 2x M.2 NVMe SSD
- Passend für M.2 NVMe SSD: 2230/2242/2260/2280, M-Key und B+M-Key
- USB4® Hostanschluss, kompatibel mit Thunderbolt™ 3/4/5, bis zu 40 Gbps für RAID 0, bis zu 20 Gbps für M.2 SSD und bis zu 6 Gbps für 3,5"/2.5" Festplatten
- RAID-Modi unterstützen 0/1/Single/Large über Schalter mittels Werkzeug
- 1x DisplayPort-Anschluss mit einer Auflösung von bis zu 8K@60 Hz
- LED-Anzeige für Stromversorgung und Laufwerksstatus
- HotSwap und Plug & Play
- 12 V/8 A Netzteil und Netzkabel im Lieferumfang enthalten


Hinweis


- Nur 2,5"/3,5" Laufwerke unterstützen Hardware RAID. M.2 Laufwerke unterstützen kein Hardware RAID, sondern nur Software RAID.
- Ein Magnet an der Unterseite des Geräts hält das RAID-Umschaltwerkzeug an seinem Platz.
- Wenn du eine defekte Festplatte austauschst, stelle sicher, dass die tatsächliche Kapazität der neuen Festplatte größer oder gleich der Kapazität der defekten Festplatte ist.
- Sichere deine Daten vor der Konfiguration von RAID, da der Einrichtungsprozess die Laufwerke zurücksetzt.
- Initialisiere die Festplatte nach der Konfiguration des RAID-Modus vor der Verwendung.

Installation und Betrieb


Einbau einer 3,5" Festplatte

1. Drücke die Taste zum Öffnen des Festplattenfachs und ziehe das Festplattenfach heraus

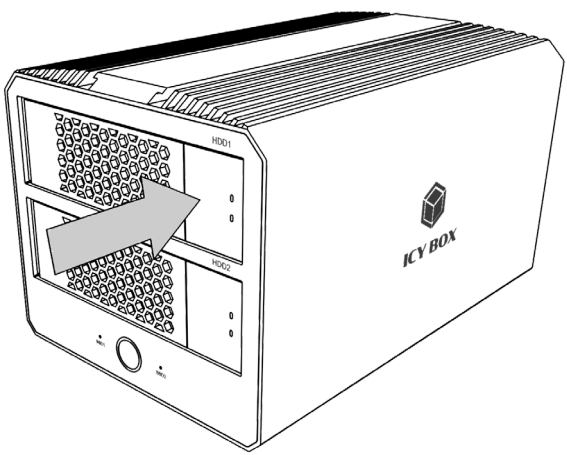


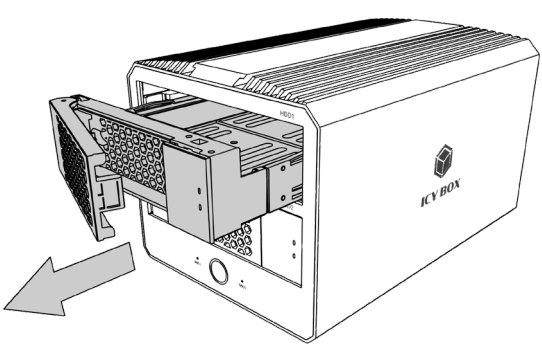


2. Klappe die seitlichen Befestigungsleisten des Fachs auf, um es zu öffnen

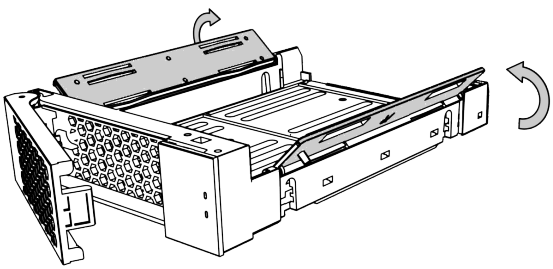


3. Setze die Festplatte ein, richte sie an den Rahmen auf beiden Seiten aus und verriegle die Festplatte

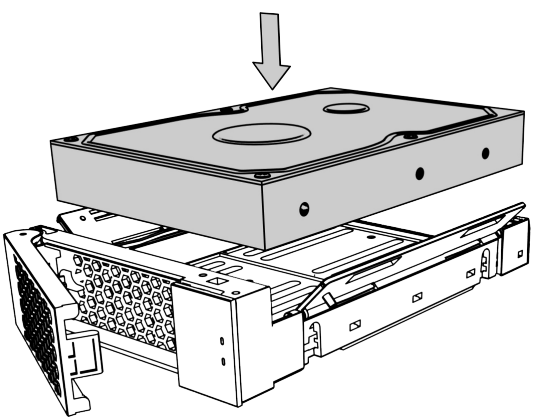

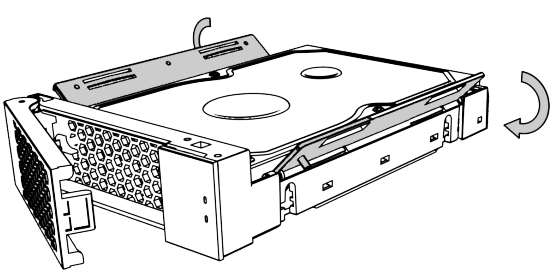


4. Schiebe das Fach mit der Festplatte zurück in das Gehäuse

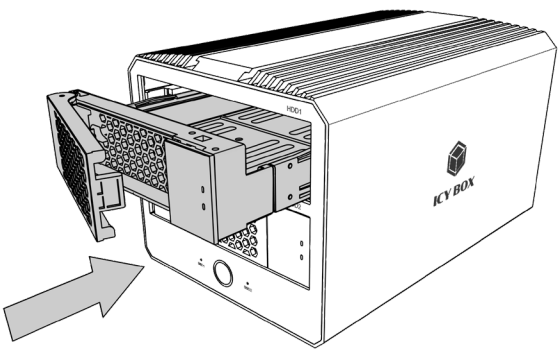


Einbau einer 2,5" Festplatte


1. Drehe das Fach um, schraube die Abdeckung ab und entferne sie

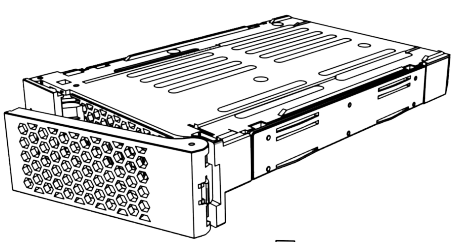


2. Setze eine 2,5" Festplatte in den Einschub ein.

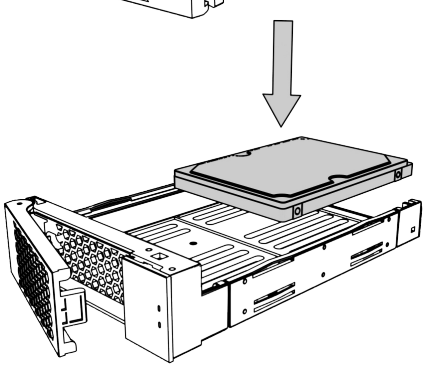

3. Richte die vier Schraubenlöcher der Festplatte auf die entsprechenden Löcher im Einschub aus und ziehe die Schrauben fest, um die Festplatte zu befestigen.

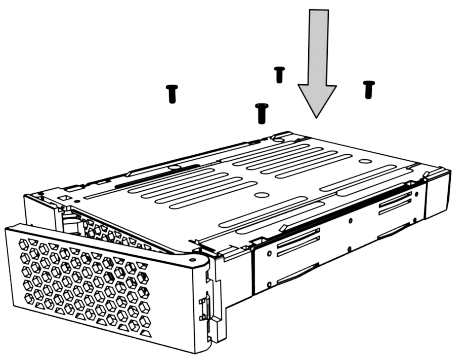


4. Drehe das Fach wieder um und schiebe es in das Gehäuse

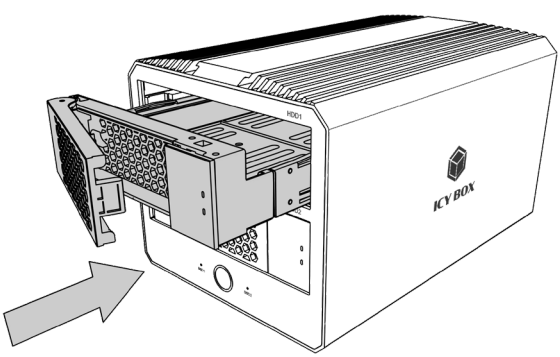


Installation einer M.2 SSD


1. Drehe das gesamte Gehäuse um und entferne die Abdeckung des Fachs

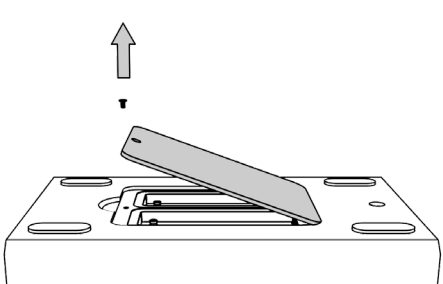

2. Setze eine oder zwei M.2 SSDs ein, bringe Wärmeleitpads an und befestige die Gummifixierung

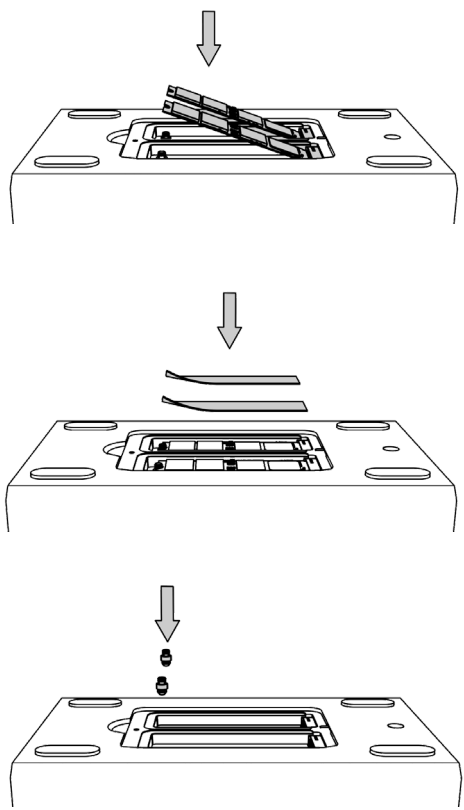


3. Setze die Fachabdeckung wieder auf und ziehe die Schrauben fest

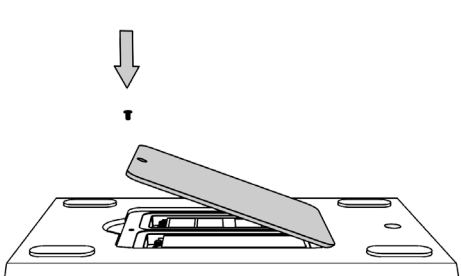


Gerätebetrieb

1. Setze zunächst deine 2,5"/3,5" Festplatte und/oder M.2 SSDs ein

2. Schließe das RAID-Gehäuse an, indem du das Datenkabel an den Computer und das Netzteil anschließt

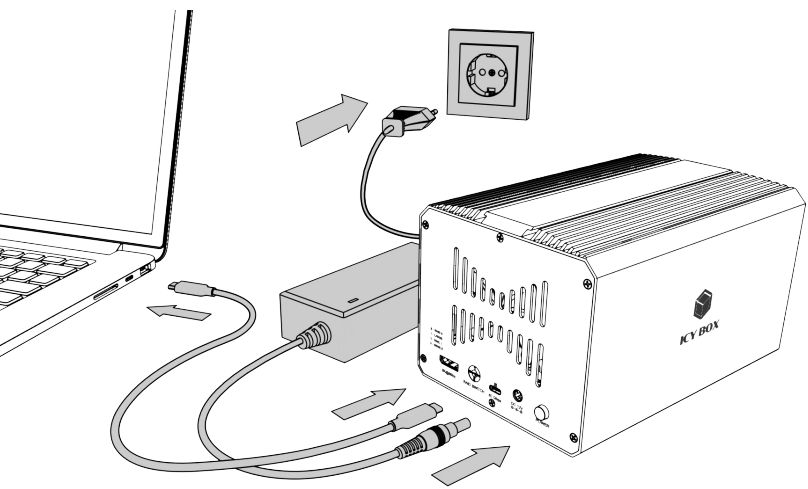


3. Drücke die Ein-/Aus-Taste, um das Gerät einzuschalten

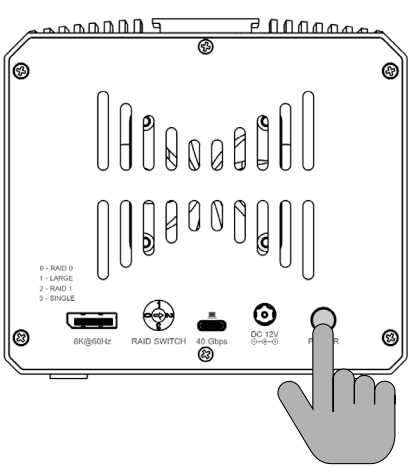


Handbuch Heart RAID 3722 Serie

Beschreibung der RAID-Modi und DIP-Schalter


RAID Einstellungen
Wähle anhand der Tabelle "RAID-Modi und DIP-Schalter" den gewünschten RAID-Modus aus und stelle den RAID-DIP-Schalter mit dem Werkzeug ein.

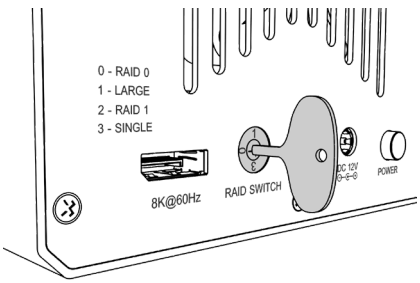



RAID 0
Legt die doppelte Kapazität der kleineren Festplatte fest und erkennt sie als eine Festplatten an.


Stelle den RAID-Switch auf Position 0.



RAID 1
Identifiziert die kleinere Festplatte und spiegelt die Daten auf das zweite Laufwerk.


Stelle den RAID-Switch auf Position 2.

Handbuch Heart RAID 3722 Serie



SINGLE
Identifiziert beide Festplatten als unabhängig voneinander.


Stelle den RAID-Switch auf Position 3.



LARGE
Identifiziert die Kapazität beider Festplatten und erkennt eine Festplatte als die Summe der beiden.

Stelle den RAID-Switch auf Position 1.

Tip
*Das DIP-Schalter-Werkzeug haftet magnetisch an der Unterseite des Geräts.

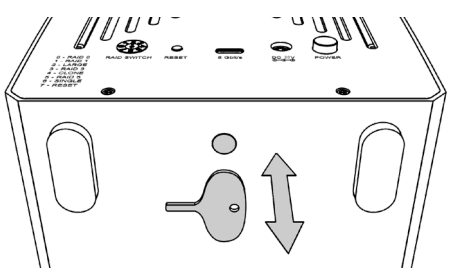



Anleitung zum Betrieb im RAID-Modus

Für Windows®

RAID


1. Wähle die Festplatte aus, klicke mit der rechten Maustaste darauf und wähle "In dynamische Festplatte konvertieren".
2. RAID-Betrieb hinzufügen

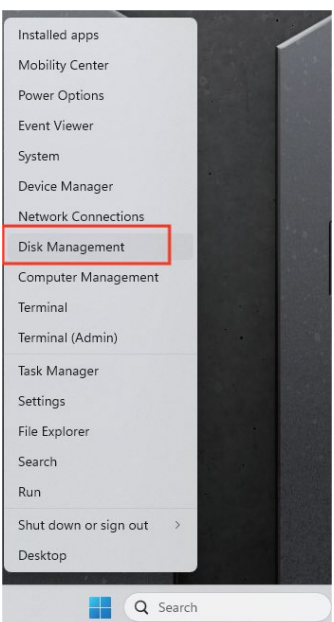

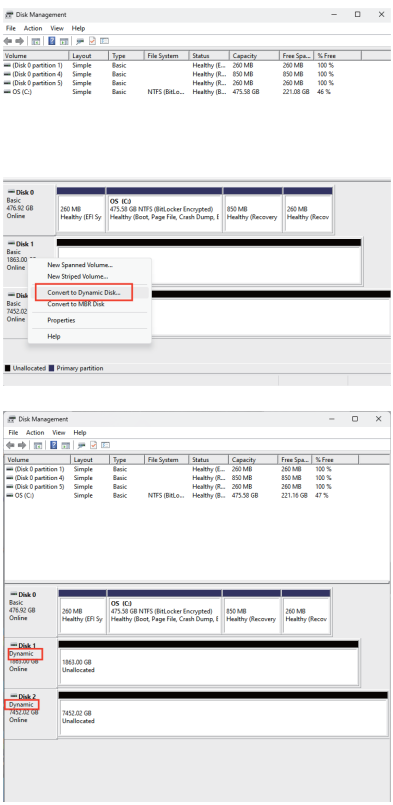


Mirroring

Klicke in der Datenträgerverwaltung mit der rechten Maustaste auf das nicht zugewiesene Volume und wähle "Neues gespiegeltes Volume". Klicke auf "Weiter", wähle die entsprechende Festplatte aus und klicke auf "Hinzufügen". Bestätige die Auswahl, klicke auf "Weiter", behalte die Standardeinstellungen bei und klicke dann auf "Fertig stellen".

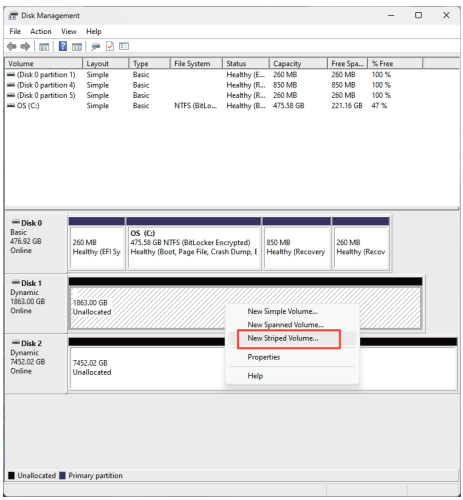

Spanning

Klicke in der Datenträgerverwaltung mit der rechten Maustaste auf das neu hinzugefügte nicht zugewiesene Volume und wähle "Neues gespiegeltes Volume". Klicke auf "Weiter", wähle die entsprechende Festplatte aus und klicke auf "Hinzufügen". Nachdem du die Auswahl der Festplatte bestätigt hast, klicke auf "Weiter". Behalte auf der nächsten Seite die Standardeinstellungen bei und klicke auf "Fertig stellen".

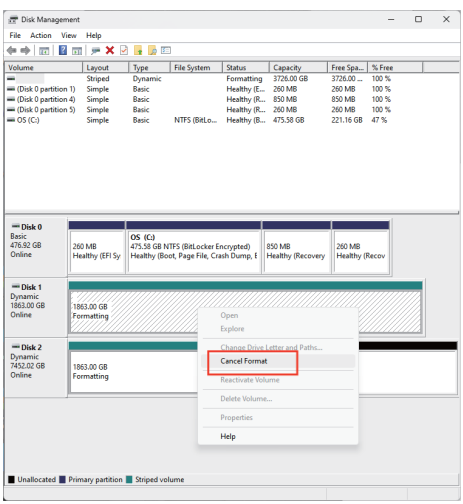


Hinweis
Klicke nach Abschluss der Einstellungen zur Bestätigung auf "Ja". Das System beginnt mit der Formatierung der Festplatte und der Erstellung des RAID-Volumes. Bitte warte, bis der Vorgang abgeschlossen ist.
Wenn du die RAID-Gruppe abbrechen möchtest, klicke mit der rechten Maustaste auf das Volume und wähle "Gespiegeltes Volume abbrechen" oder "Abbrechen".

Hinweis
Unter Windows® kann das Erstellen einer RAID-Gruppe sehr lange dauern. Lasse den Computer eingeschaltet, bis der RAID-Erstellungsprozess abgeschlossen ist.
RAID-Gruppen sind systemspezifisch. Eine unter macOS® erstellte RAID-Gruppe wird beispielsweise unter Windows® möglicherweise nicht erkannt und umgekehrt.


Manual Heart RAID 3722 series


Für macOS®

1. Öffne das Festplatten-Dienstprogramm.
Wähle in der Menüleiste "Datei" -> "RAID-Assistent".

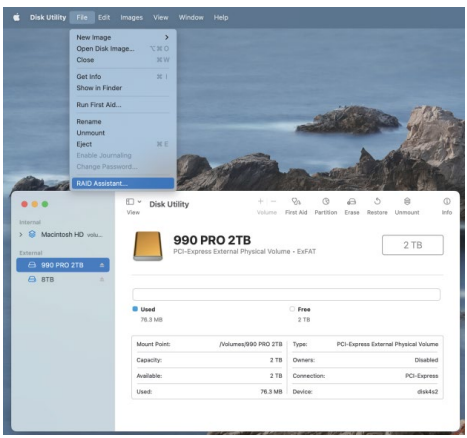


2. Wähle den gewünschten RAID-Modus.

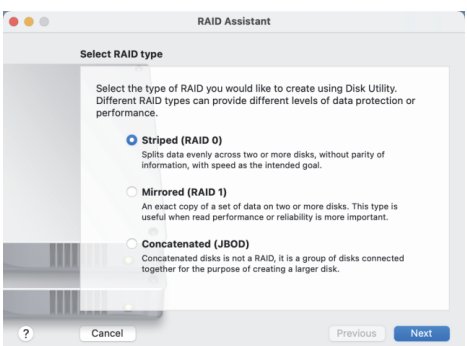


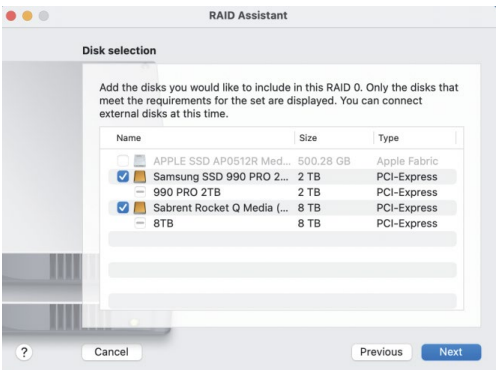


3. Wähle die Festplatten aus, die in das RAID-Array aufgenommen werden sollen.

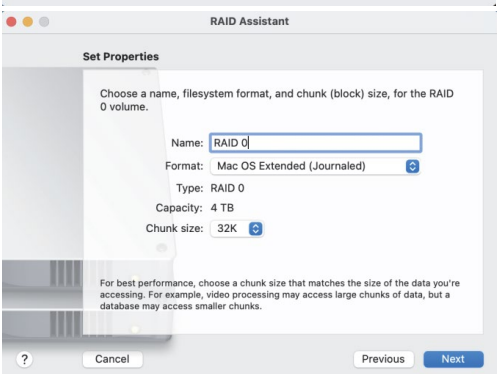

4. Um eine RAID-Gruppe zu löschen, wähle die RAID-Laufwerke in der Gruppe aus und klicke unten rechts auf "RAID löschen".

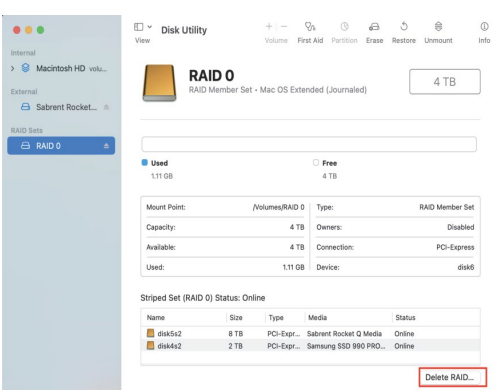

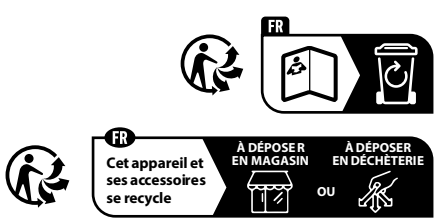

Points de collecte sur www.quefairedemesdechets.fr

© Copyright 2026 by RaidSonic Technology GmbH. All Rights Reserved.
The information contained in this manual is believed to be accurate and reliable. RaidSonic Technology GmbH assumes no responsibility for any errors contained in this manual. RaidSonic Technology GmbH reserves the right to make changes in the specifications and/or design of the above-mentioned product without prior notice. The diagrams contained in this manual may also not fully represent the product that you are using and are there for illustration purposes only. RaidSonic Technology GmbH assumes no responsibility for any differences between the product mentioned in this manual and the product you may have. Apple and macOS are registered trademarks of Apple Computer Inc. Microsoft, Windows and the Windows logo are registered trademarks of Microsoft Corporation. USB Type-C and USB-C are registered trademarks of USB Implementers Forum.