
NZXT

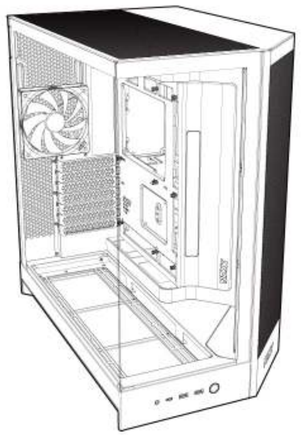

H9 FLOW SERIES

LARGE DUAL-CHAMBER MID-TOWER ATX
AIRFLOW CASE

FRONT

FRONTAL | AVANT | FRONT | ANTERIORE | FRONTAL | 전면 | フロント | 正面

COVER

TABLE OF CONTENTS

01. EXPLODED VIEW

02. CLEARANCES & SPECIFICATIONS

03. PANEL REMOVAL

04. ACCESSORY BOX

05. CABLE CONNECTIONS

06. BUTTONS & I/O

07. CONTROL HUB (FLOW RGB+ ONLY)

BACK

ATRÁS | ARRIÈRE | ZURÜCK | INDIETRO | VOLTAR | 뒷면 | 裏面 | 背面

08. CABLE MANAGEMENT

09. SSD DRIVE INSTALLATION

10. HDD DRIVE INSTALLATION

11. MOTHERBOARD INSTALLATION

12. EXPANSION CARD INSTALLATION

13. POWER SUPPLY INSTALLATION

14. FAN & RADIATOR SUPPORT

15. FAN & RADIATOR INSTALLATION


限用物质及元素列表
限用物質及元素清單

REGULATORY STATEMENT

NZXT GLOBAL WARRANTY POLICY

01. EXPLODED VIEW

VISTA EXPLOSIONADA | 확대도
VUE ÉCLATÉE | 爆開図
EXPLOSIONSDARSTELLUNG | 組合分解図
VEDUTA IN ESPLOSO | 部件分解圖
VISTA EXPLODIDA

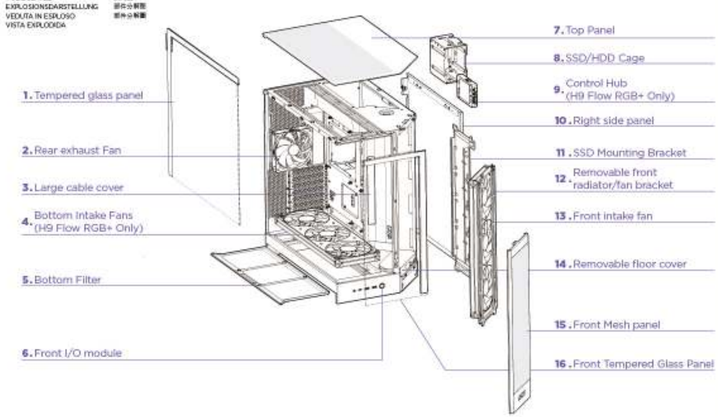

1 . Panel de cristal templado izquierdo	1 . Panneau latéral gauche en verre trempé	1 . 左側強化ガラスパネル
2 . Ventilador de escape trasero	2 . Ventilateur d'échappement arrière	2 . リア排出ファン
3 . Cubierta grande para cables	3 . Grand cache-câble	3 . 大型ケーブルカバー
4 . Ventiladores de entrada inferiores (sólo para H9 Flow RGB+)	4 . Ventilateurs d'aspiration inférieurs (uniquement pour H9 Flow RGB+)	4 . ボトム吸気ファン (H9 Flow RGB+のみ)
5 . Filtro inferior	5 . Filtre inférieur	5 . ボトムフィルター
6 . Módulo de E/S frontal	6 . Module avant E/S	6 . フロント I/O モジュール
7 . Panel superior	7 . Panneau supérieur	7 . トップパネル
8 . Jaula de SSD/HDD	8 . Logement pour disque SSD/HDD	8 . SSD/HDD ケージ
9 . Centro de control (sólo para H9 Flow RGB+)	9 . Module de contrôle (Uniquement pour H9 Flow RGB+)	9 . コントロールハブ (H9 Flow RGB+専用)
10 . Panel lateral derecho	10 . Panneau latéral droit	10 . 右サイドパネル
11 . Soporte de montaje SSD	11 . Support de montage SSD	11 . SSD マウントブラケット
12 . Soporte de radiador/ventilador frontal extraíble	12 . Support de radiateur/ventilateur avant amovible	取り外し可能なフロントラジエーター/ファンブラケット
13 . Ventilador de entrada frontal	13 . Ventilateur d'admission avant	13 . フロント吸入ファン
14 . Cubierta de suelo extraíble	14 . Revêtement de sol amovible	14 . 取り外し可能な床カバー
15 . Panel de malla frontal	15 . Panneau avant en filet	15 . フロントメッシュパネル
16 . Panel de vidrio frontal	16 . Panneau avant en acier	16 . フロントを強化ガラスパネル


1 . Painel esquerdo em vidro temperado	1 . Pannello laterale sinistro di vetro temperato	1 . 左強化ガラスパネル
2 . Ventoinha de exaustão traseira	2 . Ventola di scarico posteriore	2 . リア排出ファン
3 . Cobertura grande para cabos	3 . Copertura grande per cavi	3 . 大型ケーブルカバー
4 . Ventoinhas de entrada inferior (Apenas para H9 Flow RGB+)	4 . Ventole di aspirazione inferiori (solo per H9 Flow RGB+)	4 . ボトム吸気ファン (H9 Flow RGB+のみ)
5 . Filtro inferiores	5 . Filtro inferiore	5 . ボトムフィルター
6 . Módulo E/S frontal	6 . Modulo I/O anteriore	6 . フロント I/O モジュール
7 . Painel superior	7 . Pannello superiore	7 . トップパネル
8 . Compartimento para SSD/HDD	8 . Gabbia SSD/HDD	8 . SSD/HDD ケージ
9 . Control Hub (apenas para H9 Flow RGB+)	9 . Control Hub (solo per H9 Flow RGB+)	9 . コントロールハブ (H9 Flow RGB+専用)
10 . Painel direito	10 . Pannello laterale destro	10 . 右サイドパネル
11 . Staffa refrigeratore lato dietro	11 . Staffa di montaggio SSD	11 . SSD マウントブラケット
12 . Suporte do ventoinha/radiador frontal removível	12 . Radiatore anteriore/staffa ventola amovibile	取り外し可能なフロントラジエーター/ファンブラケット
13 . Frente e entrada das ventoinhas	13 . Ventola di ingresso frontale	13 . フロント吸入ファン
14 . Cobertura de chão removível	14 . Copertura del pavimento rimovibile	14 . 取り外し可能な床カバー
15 . Painel de malha frontal	15 . Pannello frontale in rete	15 . フロントメッシュパネル
16 . Painel de aço frontal	16 . Pannello frontale di acciaio	16 . フロントを強化ガラスパネル

1 . Panel izquierdo de vidrio templado	1 . Painel esquerdo em vidro temperado	1 . 左強化ガラスパネル
2 . Ventilador de escape trasero	2 . Ventoinha de exaustão traseira	2 . リア排出ファン
3 . Cubierta grande para cables	3 . Cobertura grande para cabos	3 . 大型ケーブルカバー
4 . Ventiladores de entrada inferiores (solo para H9 Flow RGB+)	4 . Ventoinhas de entrada inferior (Apenas para H9 Flow RGB+)	4 . ボトム吸気ファン (H9 Flow RGB+のみ)
5 . Filtro inferiores	5 . Filtro inferiores	5 . ボトムフィルター
6 . Módulo de E/S frontal	6 . Módulo E/S frontal	6 . フロント I/O モジュール
7 . Panel superior	7 . Painel superior	7 . トップパネル
8 . Compartimento para SSD/HDD	8 . Compartimento para SSD/HDD	8 . SSD/HDD ケージ
9 . Control Hub (apenas para H9 Flow RGB+)	9 . Control Hub (apenas para H9 Flow RGB+)	9 . コントロールハブ (H9 Flow RGB+専用)
10 . Panel lateral derecho	10 . Painel lateral direito	10 . 右サイドパネル
11 . Soporte de montaje SSD	11 . Staffa refrigeratore lato dietro	11 . SSD マウントブラケット
12 . Soporte del radiador/ventilador frontal extraíble	12 . Suporte do ventoinha/radiador frontal removível	取り外し可能なフロントラジエーター/ファンブラケット
13 . Ventilador de entrada frontal	13 . Frente e entrada das ventoinhas	13 . フロント吸入ファン
14 . Ventilador de suelo extraíble	14 . Cobertura de chão removível	14 . 取り外し可能な床カバー
15 . Panel de malla frontal	15 . Painel de malha frontal	15 . フロントメッシュパネル
16 . Panel de vidrio frontal	16 . Painel de aço frontal	16 . フロントを強化ガラスパネル

1 . Linke Hartglastblende	1 . 좌측 강화 유리 패널	1 . 左強化ガラスパネル
2 . Lüfter für Luftauslass an Rückseite	2 . 후면 배기팬	2 . リア排出ファン
3 . Große Kabelabdeckung	3 . 큰 케이블 커버	3 . 大型ケーブルカバー
4 . Unterseitige Lüfter (nur für H9 Flow RGB+)	4 . H9 Flow RGB+ 전용 바닥 흡입 팬	4 . ボトム吸気ファン (H9 Flow RGB+のみ)
5 . Filter unten	5 . 하단 필터	5 . ボトムフィルター
6 . E/A-Modul an der Vorderseite	6 . 전면 I/O 모듈	6 . フロント I/O モジュール
7 . Abdeckung oben	7 . 상단 패널	7 . トップパネル
8 . SSD/HDD-Käfig	8 . SSD/HDD 케이지	8 . SSD/HDD ケージ
9 . Control Hub (nur für H9 Flow RGB+)	9 . 컨트롤 허브 (H9 Flow RGB+ 전용)	9 . コントロールハブ (H9 Flow RGB+専用)
10 . Rechte Blende	10 . 우측 사이드 패널	10 . 右サイドパネル
11 . SSD-Montagehalterung	11 . SSD 마운팅 브라켓	11 . SSD マウントブラケット
12 . Abnehmbare Radiator-/Lüfterhalterung vorn	12 . 탈착식 전면 라디에이터/팬 브래킷	12 . 取り外し可能なフロントラジエーター/ファンブラケット
13 . Lüfter für Lufteinlass an Vorderseite	13 . 전면 흡기팬	13 . フロント吸入ファン
14 . Abnehmbarer Bodenbelag	14 . 분리 가능한 바닥 커버	14 . 取り外し可能な床カバー
15 . Mesh-Einsatz vorne	15 . 전면 메쉬 패널	15 . 前面網
16 . Frontstahlblende	16 . 전면 강철 패널	16 . 前面強化玻璃面板

02. CLEARANCES & SPECIFICATIONS

VISTA EXPLOSIONADA | 간격과 규격
DÉGAGEMENTS ET SPÉCIFICATIONS | 空間と仕様
ABSTÄNDE UND TECHNISCHE DATEN | 间距与规格
SPAZI NECESSARI E SPECIFICHE | 間距與規格
DIMENSÕES E ESPECIFICAÇÕES



Motherboard Support	EATX (Up to 277 mm), ATX, Micro-ATX and Mini-ITX
Rear-Connecting Motherboard Support (BTF, Project Zero)	Yes (ATX, Micro-ATX)
2.5" SSD Support	4+2
3.5" HDD Support	2
Expansion Slots	7
CPU Cooler Height	Up to 165mm
GPU Length	Up to 459 mm (with <56 mm thickness fans installed at the front-right) Up to 490 mm (with 56 mm thick 420 mm AIO and fans installed at the front-right)
PSU Length	Up to 200mm
Top Radiator & Fan Thickness	Up to 80 mm (360 mm) Up to 62 mm (420 mm)
Placas base admitidas	EATX (Up to 277 mm), ATX, Micro-ATX and Mini-ITX
Soporte trasero para placa base (BTF, Project Zero)	Sí (ATX, Micro-ATX)
Unidad de estado sólido de 2,5"	4+2
Unidad de disco duro de 3,5"	2
Ranuras de expansión	7
Espacio para refr.+D42;G42gerador del pericostador	Hasta 165 mm
Espacio para gráfica	Hasta 459 mm (con ventiladores de hasta <56 mm de grosor instalados en la parte delantera-derecha) Hasta 490 mm (con AIO de 420 mm y ventiladores de 56 mm de grosor instalados en la parte delantera-derecha)
Longitud de la fuente de alimentación	Hasta 200 mm
Grosor del radiador y de los ventiladores superiores	Hasta 80 mm (360 mm) Hasta 62 mm (420 mm)

Cartes mère prises en charge	EATX (Up to 277 mm), ATX, Micro-ATX and Mini-ITX
Support de carte mère avec connexion arrière (BTF, Project Zero)	Oui (ATX, Micro-ATX)
SSD 2,5"	4+2
Disques durs 3,5"	2
Fentes d'expansion	7
Espace libre au niveau du refroidisseur de processeur	Jusqu'à 165 mm
Espace libre au niveau de la carte graphique	Jusqu'à 459 mm (avec des ventilateurs de 56 mm d'épaisseur installés à l'avant-droit) Jusqu'à 490 mm (avec un AIO de 420 mm et des ventilateurs de 56 mm d'épaisseur installés à l'avant-droit)
Longueur de l'alimentation	Jusqu'à 200 mm
Épaisseur du radiateur et des ventilateurs du haut	Jusqu'à 80 mm (360 mm) Jusqu'à 62 mm (420 mm)
Motherboard-Unterstützung	EATX (Up to 277 mm), ATX, Micro-ATX and Mini-ITX
Unterstützung für rückseitig anschließendes Motherboard (BTF, Project Zero)	Ja (ATX, Micro-ATX)
2,5-Zoll-SSD	4+2
3,5-Zoll-Festplatte	2
Erweiterungssteckplätze	7
Freiraum für CPU-Kühler	Bis zu 165 mm
Freiraum für GPU	Bis zu 459 mm (mit Lüftern bis 56 mm Dicke, die vorne rechts installiert sind) Bis zu 490 mm (mit 56 mm dickem 420 mm AIO und Lüftern, die vorne rechts installiert sind)
Länge des Netzteils	Bis zu 200 mm
Die Dicke des oberen Radiators & der Lüfter	Bis zu 80 mm (360 mm) Bis zu 62 mm (420 mm)
Scheda madre supportata	EATX (Up to 277 mm), ATX, Micro-ATX and Mini-ITX
Supporto per scheda madre con connessione posteriore (BTF, Project Zero)	Sì (ATX, Micro-ATX)
SSD 2,5"	4+2
HDD 3,5"	2
Alloggi d'espansione	7
Ingombro refrigeratore per CPU	Fino a 165 mm
Ingombro per GPU	Fino a 459 mm (con ventole di spessore fino a 56 mm installate sulla parte anteriore destra) Fino a 490 mm (con un dissipatore a liquido di 420 mm a ventole di 56 mm di spessore installate sulla parte anteriore destra)
Lunghezza alimentatore	Fino a 200mm
Spessore del radiatore e della ventola superiore	Fino a 80 mm (360 mm) Fino a 62 mm (420 mm)
Placa-principais suportadas	EATX (Up to 277 mm), ATX, Micro-ATX and Mini-ITX
Suporte para Motherboard com Conexão Traseira (BTF, Projeto Zero)	Sim (ATX, Micro-ATX)
SSD de 2,5"	4+2
HDD de 3,5"	2
Ranhuras de expansão	7
Espaço necessário para o refrigerador da CPU	Até 165 mm
Espaço necessário para a GPU	Até 459 mm (com ventoinhas de espessura até 56 mm instaladas na frente à direita) Até 490 mm (com AIO de 420 mm e 56 mm de espessura e ventoinhas instaladas na frente à direita)
Comprimento da fonte de alimentação	Até 200 mm
Espessura do Radiador e do Ventoinha Superior	Até 80 mm (360 mm) Até 62 mm (420 mm)


메인보드 지원	EATX (Up to 277 mm), ATX, Micro-ATX and Mini-ITX
리어 연결 메인보드 지원 (BTF, Project Zero)	예 (ATX, Micro-ATX)
2.5" SSD	4+2
3.5" HDD	2
확장 슬롯	7
CPU 쿨러 간격	최대 165 mm
GPU 간격	앞쪽 오른쪽에 56mm 두께 팬을 설치했을 때 최대 459mm까지 가능해지며 두께 56mm 라디에이터 및 팬을 앞쪽 오른쪽에 56mm 두께의 420mm AIO와 팬을 설치했을 때는 최대 490mm까지 가능하다.
PSU 길이	최대 200mm
상단 라디에이터 & 팬 두께	최대 80mm (360mm까지) 최대 62mm (420mm까지)

マザーボードサポート	EATX (Up to 277 mm), ATX, Micro-ATX and Mini-ITX
後部接続マザーボードサポート (BTF, プロジェクト ゼロ)	はい (ATX, Micro-ATX) です。
2.5"SSDサポート	4+2
3.5"HDDサポート	2
エクスパンションスロット	7
CPUクーラーのクリアランス	最大 165 mm
GPUクリアランス	前右に設置された7つのファンまたは56mm未満の場合、最大459mmまで 前右に56mm厚の420mm AIOラジエーターとファンを設置した場合、最大490mmまでです。
PSU 長さ	最大 200 mm
上部ラジエーター&ファンの厚み	最大80mm (360mm用) 最大62mm (420mm用)

主板支持:	EATX (Up to 277 mm), ATX, Micro-ATX and Mini-ITX
背插接线主板支持 (BTF - Project Zero)	是的 (ATX - Micro-ATX)
2.5" SSD 支撑	4+2
3.5" HDD 支撑	2
扩展插槽	7
CPU 散热器间隙	最大 165mm
GPU 间隙	最多可以容纳459毫米 (前右方安装厚度小于56毫米的风扇时) 最多可以容纳490毫米 (前右方安装时装有420毫米AIO电动机时)
PSU 长度	最大 200mm
顶部散热器和风扇厚度	最多80毫米 (360毫米) 最多62毫米 (420毫米)

03. PANEL REMOVAL

EXTRACCIÓN DE PANEL | 패널 제거
RETRAIT DU PANNEAU | パネルの取り外し
ENTFERNEN | 脱卸面板
RIMOZIONE DEL PANNELLO | 移除面板
REMOÇÃO DOS PAINÉIS

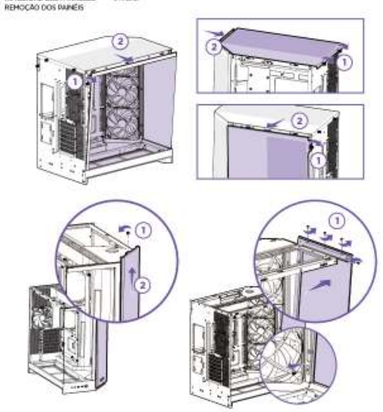




04. ACCESSORY BOX


CAJA DE ACCESORIOS | 액세서리 박스
BOÎTE D'ACCESSOIRES | 配件盒
ZUBEHÖRSET | 配件盒
SCATOLA DEGLI ACCESSORI | 零件盒
CAIXA DE ACESSÓRIOS

A	Hexagon Screw 6-32 x 6mm	x4	
B	Screw 6-32 x 5mm	x17	
C	Screw M3 x 5mm	x24	
D	Screw CB5 x 10mm	x36	
E	Standoff 6-32*8.5+4mm	x1	
F	Standoff Wrench	x1	
G	Small Cable Cover	x1	
H	Short Velcro	x3	
I	Cable ties	x15	

05. CABLE CONNECTIONS


DISCO DE ADMINISTRACIÓN DE CABLES | 케이블 관리
CONNEXIONS DES CÂBLES | ケーブル接続
KABELVERBINDUNGEN | 线缆连接
COLLEGAMENTI DEI CAVI | 线路接线
LIGAÇÕES DE CABOS

For Intel Standard F_Panel Header Use	USB 3.2 GEN X2 TYPE-C	USB 3.2 GEN 1 TYPE-A
		

HD AUDIO	POWERING THE LEDS (5V ARGB)
	

06. BUTTONS & I/O

BOTONES Y E/S | 버튼 및 I/O
BOUTONS ET E/S | ボタンおよび I/O
TASTEN UND E/A | 按钮和 I/O
PULSANTI E I/O | 按钮和 I/O
BOTÕES E E/S



1 Headset Jack
2 USB 3.2 Gen2x2 Type-C
3 USB 3.2 Gen1 Type-A
4 Power Switch
5 Power LED


1 . Jack para auriculares	1 . Ingresso Cuffie	1 . ヘッドセットジャック
2 . USB 3.2 Gen2x2 Type-C	2 . USB 3.2 Gen2x2 Type-C	2 . USB 3.2 Gen2x2 Type-C
3 . USB 3.2 Gen1 Type-A	3 . USB 3.2 Gen1 Type-A	3 . USB 3.2 Gen1 Type-A
4 . Interruptor de encendido	4 . Interruttore d'alimentazione	4 . 電源スイッチ
5 . LED da alimentación	5 . LED alimentazione	5 . パワーLED

1 . Prise Casque	1 . Jack de fone de ouvido	1 . 耳机麦克风插孔
2 . USB 3.2 Gen2x2 Type-C	2 . USB 3.2 Gen2x2 Type-C	2 . USB 3.2 Gen2x2 Type-C
3 . USB 3.2 Gen1 Type-A	3 . USB 3.2 Gen1 Type-A	3 . USB 3.2 Gen1 Type-A
4 . Interrupteur marche/arrêt	4 . Interruptor de alimentação	4 . 电源开关
5 . Témoin d'alimentation	5 . LED da alimentação	5 . 电源LED

1 . Headset-Buchse	1 . 헤드셋 잭	1 . 耳機麥克風插孔
2 . USB 3.2 Gen2x2 Type-C	2 . USB 3.2 Gen2x2 Type-C	2 . USB 3.2 Gen2x2 Type-C
3 . USB 3.2 Gen1 Type-A	3 . USB 3.2 Gen1 Type-A	3 . USB 3.2 Gen1 Type-A
4 . Netzschalter	4 . 전원 스위치	4 . 電源開關
5 . Betriebs-LED	5 . 전원 LED	5 . 電源LED

07. CONTROL HUB

FLOW RGB+ (ONLY)

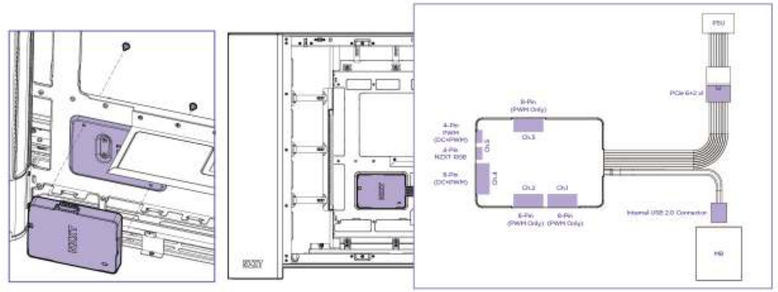

- The NZXT Control Hub is compatible with all NZXT RGB fans and lighting products. NZXT RGB channel supports a maximum of 40 LEDs. The 8-pin port(s) supports up to a total of 96 LEDs per channel.
- Please note to use the channels that support DC voltage fan control when connecting a 3-pin fan.
- Different types of lighting accessories (i.e., F-series RGB Fans, Aer RGB Fans, LED strip, etc.) cannot be mixed within a channel.

NOTE


- The Control Hub LED will flash twice continuously for 10 seconds and run the fans at 100% speed to indicate when the USB cable is disconnected.
- The Control HUB LED will blink continuously to indicate when the PCIe power cable is not connected.


P05-0000045-V03

08. CABLE MANAGEMENT

BARRA PARA CABLES 케이블 관
BARRE DE CÂBLAGE 케이블바
KABELSCHIENE 케이블정돈
BARRA DEI CAVI 케이블정돈
BARRA DE CABOS 케이블정돈


- 24-PIN Motherboard Power Cable
- GPU Power Cable
- SATA Cable
- Fan Cable Channel

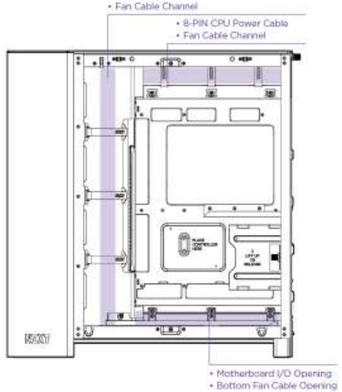

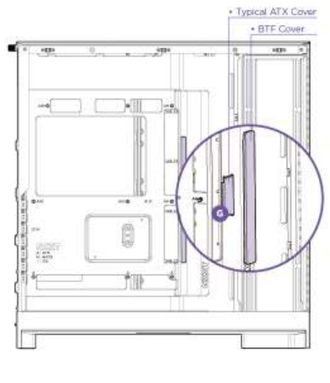


09. SSD DRIVE INSTALLATION

INSTALACIÓN DE LA UNIDAD DE DISCO DE ESTADO SÓLIDO SSD 드라이브 설치
INSTALLATION DU DISQUE SSD SSD 장착
SSD-LAUFWERKSINSTALLATION SSD 설치용
INSTALLAZIONE DELL'UNITÀ SDD
INSTALAÇÃO DA PLACA DE EXPANSÃO

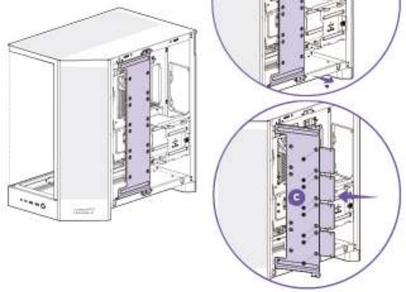


C Screw M3 x 5mm

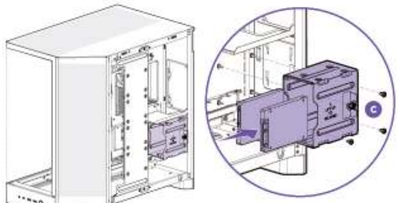

10. HDD DRIVE INSTALLATION

INSTALACIÓN DE LA UNIDAD DE DISCO DURO HDD 드라이브 설치
INSTALLATION DE LECTEUR HDD HDD 장착
HDD-LAUFWERKSINSTALLATION HDD 장착용 브라켓
INSTALLAZIONE DELL'UNITÀ HDD HDD 설치용 브라켓
INSTALAÇÃO DA PLACA DE EXPANSÃO

B Screw 6-32 x 5mm

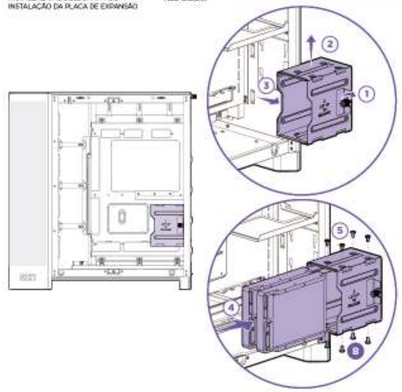


11. MOTHERBOARD INSTALLATION

INSTALACIÓN DE LA PLACA BASE 마더보드 설치
INSTALLATION DE LA CARTE MÈRE 마더보드 장착
INSTALLATION DER HAUPTPLATINE 마더보드 장착
INSTALLAZIONE DELLA SCHEDA MADRE 마더보드 장착
INSTALAÇÃO DA PLACA PRINCIPAL 마더보드 장착


B Screw 6-32 x 5mm

A : ATX
M : MATX
I : ITX

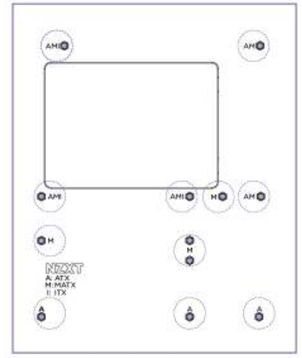

12. EXPANSION CARD INSTALLATION


INSTALACIÓN DE LA TARJETA DE EXPANSIÓN 확장 카드 설치
INSTALLATION DE LA CARTE D'EXTENSION 拡張カードの装着
INSTALLATION DER ERWEITERUNGSKARTE 확장 카드 장착
INSTALLAZIONE DELLA SCHEDA D'ESPANSIONE 拡張ボード取付
INSTALAÇÃO DA PLACA DE EXPANSÃO

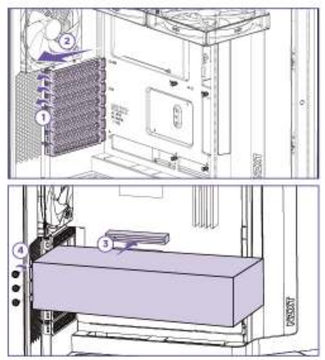

13. POWER SUPPLY INSTALLATION

INSTALACIÓN DE LA FUENTE DE ALIMENTACION 전원공급장치 설치
INSTALLATION DE L'ALIMENTATION 電源の装着
INSTALLATION DER STROMVERSORGUNG 電源装置
INSTALLAZIONE DELL'ALIMENTATORE 電源装置
INSTALAÇÃO DA FONTE DE ALIMENTAÇAO


A Hexagon Screw 6-32 x 6mm

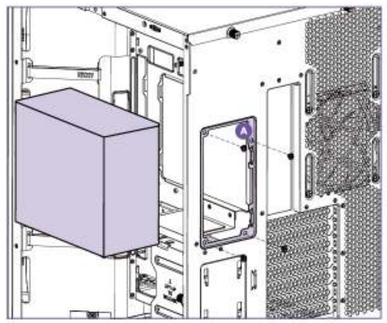

14. FAN & RADIATOR SUPPORT

COMPATIBILIDAD DE VENTILADORES Y RADIADORES 팬 및 라디에이터 지원
PRISE EN CHARGE DES RADIATEURS ET VENTILATEURS 対応ファンおよびラジエータ
LÜFTER- UND KÜHLER-UNTERSTÜTZUNG 冷却ファンおよびラジエーターのサポート
SUPPORTO VENTOLE E RADIATORE 電源装置
SUPORTE PARA VENTOINHA E A RADIADOR 風扇和散熱器支撐


Fan
Radiator

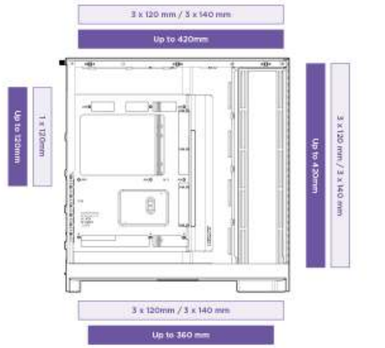


15. FAN & RADIATOR INSTALLATION

INSTALACIÓN DE VENTILADORES Y RADIADORES 팬 및 라디에이터 설치
INSTALLATION DES RADIATEURS ET VENTILATEURS ファンとラジエーターの取り付け
LÜFTER- UND KÜHLER-INSTALLATION 冷却ファンおよびラジエーターの取り付け
INSTALLAZIONE VENTOLE E RADIATORE 風扇和散熱器安裝
INSTALAÇÃO PARA VENTOINHA E A RADIADOR

D Screw CB5 x 10mm

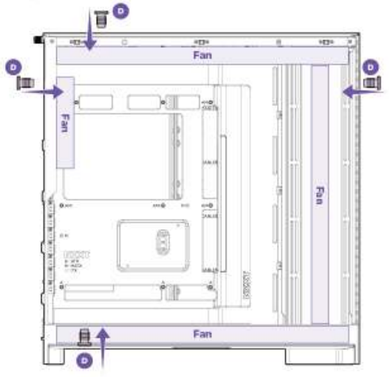

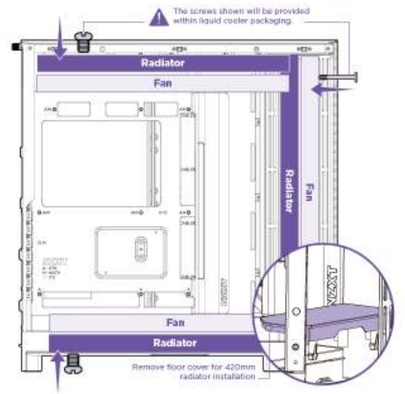

限用物质及元素列表 / 限用物質及元素清單

产品名称：机箱；型號（型式）：CA-2401, CA-2403, CA-2404

有害物质及元素符号

部件名称	铅(Pb)	镉(Cd)	汞(Hg)	六价铬(Cr⁺⁶)	多溴联苯(PBB)	多溴二苯醚(PBDE)
外壳	○	○	○	○	○	○
线材	○	○	○	○	○	○
主电路板	○	○	○	○	○	○
显示/面板	○	○	○	○	○	○
配件单元	○	○	○	○	○	○

本表格依据SJ/T 11364的规定编制。

○：表示该有害物质在该部件所有均质材料中的含量均在GB/T 26572规定的限量要求下。

×：表示该有害物质至少在该部件的某一均质材料中的含量超出GB/T 26572规定的限量要求，然而该部件仍符合欧盟指令2011/65/EU的规范。

產品名稱：機箱，型號（型式）：CA-2401, CA-2403, CA-2404

限用物質及其化學符號

單元	鉛(Pb)	鎘(Cd)	汞(Hg)	六價鉻(Cr⁺⁶)	多溴聯苯(PBB)	多溴二苯醚(PBDE)
外殼	○	○	○	○	○	○
線材	○	○	○	○	○	○
主電路板	○	○	○	○	○	○
顯示器/面板	○	○	○	○	○	○
配件單元	○	○	○	○	○	○

備考1. "超出0.1wt%"及"超出0.01wt%"係指限用物質之百分比含量超出百分比含量基準值。
備考2. "○"係指該項限用物質之百分比含量未超出百分比含量基準值。
備考3. "-"係指該項限用物質為排除項目。

P05-0000045-V03

REGULATORY STATEMENT

RACCOLTA CARTA PAP

Ce appareil, ses accessoires et cordons se recyclent

À DÉPOSER EN MAGASIN OU À DÉPOSER EN DÉCHÈTERIE

Points de collecte sur www.quefairedesmesdechets.fr

UKCA DECLARATION OF CONFORMITY
The object of the declaration described above is in conformity with the relevant UK harmonization legislation:
- Electromagnetic Compatibility Regulations 2016
- The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012

ROHS STATEMENT
This product is compliant to implemented RoHS (Restriction of Hazardous Substances) type regulations worldwide, including but not limited to China, India, Japan, Korea and European Union.

REACH STATEMENT
EU REACH (Info) Disclosure on Candidate List
REACH (Registration, Evaluation, Authorization and Restriction of Chemicals, EC 1907/2006) is the European Union's (EU) chemical substances regulatory framework. REACH requires NZXT Inc. to provide customers with sufficient information on Substances of Very High Concern (SVHC) contained in products in concentration above 0% weight by weight (w/w) to allow safe use of the product.

DECLARATION OF CONFORMITY
The device complies with the requirements set out in the Council Directives relevant Union harmonisation legislation:
- EMC Directive 2014/30/EU
- RoHS Directive 2011/65/EU & (EU) 2015/863

DECLARATION DE CONFORMITE
L'appareil est conforme aux exigences définies dans les directives du Conseil relatives à la législation d'harmonisation de l'Union :
- Directive EMC 2014/30/UE
- Directive RoHS 2011/65/UE et (UE) 2015/863

DECLARACIÓN DE CONFORMIDAD
El dispositivo cumple los requisitos impuestos en las directivas del Consejo relativas a la legislación de armonización de la Unión Europea:
- Directiva sobre compatibilidad electromagnética 2014/30/UE
- Directiva sobre sustancias peligrosas 2011/65/UE y (UE) 2015/863

DECLARAÇÃO DE CONFORMIDADE
O dispositivo está conforme aos requisitos das Diretivas do Conselho e relevante legislação de harmonização da União Europeia:
- Diretiva EMC 2014/30/UE
- Diretiva RoHS 2011/65/UE & (UE) 2015/863

DICHIARAZIONE DI CONFORMITÀ
Il dispositivo è conforme ai requisiti definiti nelle Direttive del Consiglio relative alla Norma sull'armonizzazione dell'Unione:
- Direttiva EMC 2014/30/UE
- Direttiva RoHS 2011/65/UE e (UE) 2015/863

KONFORMITÄTSERKLÄRUNG
Das Gerät entspricht den Anforderungen der entsprechenden EU-Harmonisierungsrichtlinien des Rates:
- EMV-Richtlinie 2014/30/EU
- RoHS-Richtlinie 2011/65/EU & (EU) 2015/863

ЗАЯВЛЕНИЕ О СООТВЕТСТВИИ
Это устройство отвечает требованиям, изложенным в Директивах Совета о гармонизации соответствующих законов государств, входящих в состав Европейского союза (ЕС):
- Директива 2014/30/ЕU об электромагнитной совместимости
- Директива 2011/65/EU и (ЕU) 2015/863 об ограничении использования определенных видов опасных веществ в электрическом и электронном оборудовании (RoHS)

OŚWIADCZENIE ZGODNOŚCI
Urządzenie jest zgodne z wymaganiami określonymi w odpowiednich unijnych Dyrektywach harmonizacyjnych Rady:
- Dyrektywa EMC 2014/30/UE
- Dyrektywa RoHS 2011/65/UE & (UE) 2015/863

UYUM BEYANI
Aşağı, Konsey Yönergeleri ile ilgili Birlik uyum mevzuatında belirtilen şartlara uygundur:
- EMC Yönergesi 2014/30/EU
- RoHS Yönergesi 2011/65/EU & (EU) 2015/863

ÖVERENSSTÄMMELSEFÖRKLARING
Enheten er i overensstemmelse med kravene i Rådets direktiv, relevant til EU's lovgivning om harmonisering:
- EMC-direktiv 2014/30/EU
- RoHS-direktiv 2011/65/EU og (EU) 2015/863

VAATIMUSTENMUKAISUUSVAKUUTUS
Laite on Euroopan neuvoston direktiivien olennaisen unionin harmonisointilainsäädännön vaatimusten mukainen:
- EMC-direktiivi 2014/30/EU
- RoHS-direktiivi 2011/65/EU & (EU) 2015/863

SAMSVARSERKLÆRING
Enheten overholder kravene i EU-rådets harmoniseringsdirektiver:
- EMC-direktiv 2014/30/EU
- RoHS-direktiv 2011/65/EU & (EU) 2015/863

KONFORMITETSDEKLARATION
Enheten uppfyller kraven som anges i Rådets direktiv relevanta harmoniseringslagstiftning för Europeiska unionen:
- EMC-direktivet 2014/30/EU
- RoHS-direktiv 2011/65/EU & (EU) 2015/863

DECLARAȚIE DE CONFORMITATE
Dispozitivul respectă cerințele menționate în Directivele Consiliului și în legislația armonizată relevantă la nivelul Uniunii:
- Directiva privind compatibilitatea electromagnetică 2014/30/UE
- Directiva RoHS 2011/65/UE și (UE) 2015/863

PROHLÁŠENÍ O SHODĚ
Zařízení odpovídá požadavkům stanoveným ve směrnicích Rady podle příslušných harmonizačních právních předpisů Unie:
- Směrnice o elektromagnetické kompatibilitě 2014/30/EU
- Směrnice o RoHS 2011/65/EU a (EU) 2015/863

VERKLARING VAN OVEREENSTEMMING
Het apparaat voldoet aan de vereisten van de relevante richtlijnen van de Raad met betrekking tot harmonisatiewetgeving in de Unie:
- EMC-richtlijn 2014/30/EU
- RoHS-richtlijn 2011/65/EU & (EU) 2015/863

MEGFELELŐSSÉGI NYILATKOZAT
Az eszköz megfelel a Tanács irányelvek releváns uniós harmonizációs rendelkezései által felállított követelményeknek:
- 2014/30/EU EMC-irányelv
- 2011/65/EU és (EU) 2015/863 RoHS-irányelv

ДЕКЛАРАЦИЯ ЗА СЪОТВЕТСТВИЕ
Устройството отговаря на изискванията на приложимото законодателство на Съюза за хармонизация на директивите на Съвета:
- ЕМС директива 2014/30/ЕС
- RoHS директива 2011/65/ЕС & (ЕС) 2015/863

ΔΗΛΩΣΗ ΣΥΜΜΟΡΦΩΣΗΣ
Η συσκευή συμμορφώνεται με τις απαιτήσεις που καθορίζονται στις Οδηγίες του Συμβουλίου Συμβάλλοντας και σχετίζονται με τη νομοθεσία περί εναρμόνισης της Ένωσης:
- Οδηγία περί ΗΜΣ 2014/30/ΕΕ
- Οδηγία περί RoHS 2011/65/ΕΕ & (ΕΕ) 2015/863

To protect the global environment and as an environmentalist, NZXT must remind you that:
Under the European Union ("EU") Directive on Waste Electrical and Electronic Equipment, which takes effect on August 13, 2005, products of "electrical and electronic equipment" cannot be discarded as municipal waste anymore and manufacturers of covered electronic equipment will be obligated to take back such products at the end of their useful life. NZXT will comply with the product take-back requirements at the end of life of NZXT-branded products that are sold into the EU. You can return these products to local collection points.

En tant qu'écologiste et afin de protéger l'environnement, NZXT tient à rappeler ceci:
Au sujet de la directive européenne (EU) relative aux déchets des équipement électriques et électroniques, directive 2002/96/EC, prenant effet le 13 août 2005, que les produits électriques et électroniques ne peuvent plus être déposés dans les décharges ou tout simple-ment mis à la poubelle. Les fabricants de ces équipements seront obligés de récupérer certains produits en fin de vie. NZXT prendra en compta cette exigence relative au retour des produits en fin de vie au sein de la communauté européenne. Par conséquent vous
pouvez retourner localement ces matériels dans les points de collecte.

NZXT GLOBAL WARRANTY POLICY

This NZXT Global Warranty Policy governs the sale of products by NZXT to you.

I. WARRANTY LENGTH

New NZXT Product	Warranty Length for Parts
Computer Cases	2 Years

Any replacement product will be covered under warranty for the remainder of the warranty period or thirty days, whichever is longer. Proof of purchase is required for warranty service.

II. WHO IS PROTECTED
The Warranty covers only NZXT products purchased by the original consumer.

III. WHAT IS AND IS NOT COVERED
Please note that our warranty is not an unconditional guarantee. If the product, in NZXT's reasonable opinion, malfunctions within the warranty period, NZXT will provide you at its sole discretion with a repaired or replacement product, either new or refurbished, with a similar function that is equal or greater in value depending on supply. Our warranty does not cover the following:

- any product or serial number/warranty sticker modification applied without permission from NZXT;
- any damage that is not a manufacturing defect;
- damage, deterioration or malfunction resulting from: accident, abuse, misuse, neglect, fire, water, lightning, or other acts of nature, unauthorized product modification or failure to follow instructions included with the product;
- improper installation, unauthorized alterations or modifications, or repair or attempted repair by anyone not authorized by NZXT;
- shipping or transport damage (claims must be made with the carrier);
- normal wear and tear.

NZXT does not warrant that this product will meet your requirements. It is your responsibility to determine the suitability of the product for your purpose. For NZXT Store orders, we cover two way return shipping for all exchanges and returns. For all other authorized dealers, NZXT Support does not cover return shipping and only covers one way shipping from NZXT back to the end user for exchanges. Two way expedited shipping is provided for all RMAs covered under the Less Than Three program, indiscriminate of purchase location, provided the location is an approved NZXT reseller.

IV. EXCLUSION OF DAMAGES (DISCLAIMER)
NZXT's sole obligation and liability under this warranty is limited to the repair or replacement of a defective product with either a new or refurbished product with a similar function that is equal or greater in value at our option. NZXT shall not, in any event, be liable for any incidental or consequential damage, including but not limited to damages resulting from interruption of service and loss of data, business, or for liability in tort relating to this product or resulting from its use or possession.

V. LIMITATIONS OF IMPLIED WARRANTIES
There are no other warranties, expressed or implied, including but not limited to those of merchantability or fitness for a particular purpose. The duration of implied warranties is limited to the warranty length specified in Paragraph I.

VI. TO OBTAIN TECHNICAL SUPPORT
If you have already experienced your product owner's manual and still need help, you may contact us by phone at +1 (800) 228-9396 / by email at service@nzxt.com, or visit the NZXT Support site at: nzxt.com/customer-support.

VII. HOW TO OBTAIN A WARRANTY SERVICE FROM NZXT
To receive a warranty service for your product when purchased directly from NZXT, you must submit a request via the NZXT Support site outlining the problem. If a technician deems the product defective or requiring testing, you will be required to provide a copy of your proof of purchase, which will enable you to submit a Return Merchandise Authorization "RMA" request.

Once approved, you' ll receive an RMA number, upon which you will be asked to ship the defective item back to NZXT with the RMA number clearly marked or labelled on the package. NZXT recommends that appropriate measures are taken to safeguard the product from damage during shipping.

VIII. APPLICABLE LAW AND ADDITIONAL LEGAL RIGHTS FOR CONSUMERS
This warranty gives you specific legal rights. These conditions are governed and construed in accordance with the laws of California (with exception of its conflict of law provisions), and the application of the United Nations Convention of Contracts for the International Sale of Goods is expressly excluded. The non-exclusive jurisdiction of the courts of California is agreed, which means that you may bring a claim to enforce your consumer protection rights in connection with the Global Warranty in the country which you have your habitual residence where you may have additional rights. These rights may vary.

For original consumers who are covered by consumer protection laws or regulations in their country, state, or province of purchase or, if different, their country, state, or province of residence, the benefits conferred by this warranty are in addition to all rights and remedies conveyed by such consumer protection laws and regulations. To the extent that liability under such consumer laws can be limited, NZXT's liability is limited, and its sole option, to repair or replacement, either new or refurbished, with a similar function that is equal or greater in value depending on supply.

In the United Kingdom:

- For NZXT products sold to customers in the UK, during the expected lifespan of your product your legal rights entitle you to the following:
  - Up to 30 days: if your goods are faulty, then you can get an immediate refund.
  - Up to six months: if your goods can't be repaired or replaced, then you're entitled to a full refund, in most cases.
  - Up to six years: if your goods do not last a reasonable length of time you may be entitled to some money back.
- If the person seeking to rely on the guarantee is not the original consumer, the NZXT Warranty will cover the product in relation to that person provided that they are able to provide proof of the transfer of the benefit of the guarantee from the original consumer.
- The implied warranties under the Consumer Rights Act 2015 says that your goods must be as described, fit for all purposes for which such goods are usually supplied, and of satisfactory quality.

In the EU:

- If you are a consumer and have your habitual residence in the EU, you additionally enjoy the protection afforded to you by provisions that cannot be derogated from by agreement by virtue of the law where you have your habitual residence.

IX. WARRANTY SERVICE FROM RESELLERS
In the event that a warranty service is sought, you must provide proof of purchase (store receipt or invoice) in order to receive this service and if deemed necessary, repair or replacement product.

In North America:
Within the first 60 days after purchase, please return your product (or for power supplies installed within our enclosures, just the failed power supply) to your dealer or reseller for a replacement. If the product is still within warranty and you can no longer return it to your dealer, please contact NZXT Customer Support (see above) for assistance and instructions. NZXT will not accept returns without prior approval and an RMA number.

In Europe:
Within the first year after purchase, please return your product (or for power supplies installed within our enclosures, just the failed power supply) to your dealer or reseller for a replacement. If the product is still within warranty and you can no longer return it to your dealer, please contact NZXT Customer Support (see above) for assistance and instructions. NZXT will not accept returns without prior approval.

In Australia:
Within the first two years after purchase, please return your product (or for power supplies installed within our enclosures, just the failed power supply) to your dealer or reseller for a replacement. If the product is still within warranty and you can no longer return it to your dealer, please contact NZXT Customer Support (see above) for assistance and instructions. NZXT will not accept returns without prior approval.
The cost of shipping will be borne at the first instance by you; however, if the purchased item is defective, NZXT will reimburse reasonable postage or transportation of costs.

Outside North America, Europe, and Australasia:
If your product needs to be returned within the warranty period, please contact the retailer or distributor from where you purchased the product.

X. NZXT.COM STORE RETURNS/EXCHANGE POLICY
Eligible products under this NZXT Warranty qualify for a full refund or exchange only with an authorized RMA number and if the item is returned to the NZXT.com store inventory within 30 days of purchase. Returns are not allowed beyond 30 days of the purchase date. The NZXT.com Store reserves the right to deny any return or exchange. Refunds will be credited to the original method of payment. To initiate a return, simply submit a request via NZXT support site.

> Visit nzxt.com/warranty and support.nzxt.com for information on warranty coverage and service.
> Visita al sitio Web nzxt.com/warranty y support.nzxt.com para obtener información sobre la cobertura y el servicio de la garantía.
> Visitez nzxt.com/warranty et support.nzxt.com pour les informations de la couverture de la garantie et du service.
> Informationen zu Geltungsbereich und Service der Garantie finden Sie unter support.nzxt.com und nzxt.com/warranty.
> Visitare il sito nzxt.com/warranty e support.nzxt.com per informazioni sulla copertura e sul servizio della garanzia.
> Visita nzxt.com/warranty e support.nzxt.com para obter informações sobre a cobertura da garantia e assistência.
> 제품 보증 범위와 서비스 정보를 확인하시려면 nzxt.com/warranty 또는 support.nzxt.com 을 방문해 주세요 (영문).
> 保証範囲およびサービスに関する情報については、support.nzxt.com と nzxt.com/warranty にアクセスしてください。
> 请访问 nzxt.com/warranty 和 support.nzxt.com 了解保修范围和服务信息。
> 請訪問 nzxt.com/warranty 和 support.nzxt.com 了解產品保固範圍和服務資訊。

longer return it to your dealer, please contact NZXT Customer Support (see above) for assistance and instructions. NZXT will not accept returns without prior approval.
The cost of shipping will be borne at the first instance by you; however, if the purchased item is defective, NZXT will reimburse reasonable postage or transportation of costs.

Outside North America, Europe, and Australasia:
If your product needs to be returned within the warranty period, please contact the retailer or distributor from where you purchased the product.

X. NZXT.COM STORE RETURNS/EXCHANGE POLICY
Eligible products under this NZXT Warranty qualify for a full refund or exchange only with an authorized RMA number and if the item is returned to the NZXT.com store inventory within 30 days of purchase. Returns are not allowed beyond 30 days of the purchase date. The NZXT.com Store reserves the right to deny any return or exchange. Refunds will be credited to the original method of payment. To initiate a return, simply submit a request via NZXT support site.

> Visit nzxt.com/warranty and support.nzxt.com for information on warranty coverage and service.
> Visita al sitio Web nzxt.com/warranty y support.nzxt.com para obtener información sobre la cobertura y el servicio de la garantía.
> Visitez nzxt.com/warranty et support.nzxt.com pour les informations de la couverture de la garantie et du service.
> Informationen zu Geltungsbereich und Service der Garantie finden Sie unter support.nzxt.com und nzxt.com/warranty.
> Visitare il sito nzxt.com/warranty e support.nzxt.com per informazioni sulla copertura e sul servizio della garanzia.
> Visita nzxt.com/warranty e support.nzxt.com para obter informações sobre a cobertura da garantia e assistência.
> 제품 보증 범위와 서비스 정보를 확인하시려면 nzxt.com/warranty 또는 support.nzxt.com 을 방문해 주세요 (영문).
> 保証範囲およびサービスに関する情報については、support.nzxt.com と nzxt.com/warranty にアクセスしてください。
> 请访问 nzxt.com/warranty 和 support.nzxt.com 了解保修范围和服务信息。
> 請訪問 nzxt.com/warranty 和 support.nzxt.com 了解產品保固範圍和服務資訊。

Scan the QR code or visit nzxt.com product page to view or download the full manual.

NZXT, Inc. | 6015 E Huntington Drive, Suite 215, Monrovia, CA 91016 USA.
NZXT Europe GmbH | Ammerthalstrasse 32 Kirchheim bei Muenchen 85551, Germany
NZXT UK Ltd. | First Floor 5 Fleet Place London EC4M 7RD, GB United Kingdom
+1 (800) 228-9396 / service@nzxt.com / nzxt.com