

TP-Link 10-Port Gigabit Desktop Switch mit 8-Port PoE+

Marke : TP-Link

Artikel-Code: TL-SG1210MP

Produktname : 10-Port Gigabit Desktop Switch mit 8-Port PoE+

- 9x Gigabit-RJ45-Ports und 1x Gigabit-Combo-SFP/RJ45-Port
 - 8x PoE+-Ports übertragen Daten und Strom über ein einziges Kabel mit einem Gesamtleistungsbudget von 123 W
 - Gemäß IEEE 802.3af/at PoE+ unterstützt der Switch PoE-Leistung bis zu 30 W für jeden PoE-Port
 - Bis zu 250 m Daten- und Energieübertragungsbereich im Extend Mode
 - Der Prioritätsmodus gewährleistet eine hohe Priorität der Ports 1-2, um die Qualität der sensiblen Anwendungen zu gewährleisten
 - Der Isolationsmodus ermöglicht die Trennung des Client-Datenverkehrs mit einem Klick für höhere Sicherheit und Leistung
 - Startet Ihre ausgefallenen oder nicht reagierenden PoE-betriebenen Geräte automatisch mit PoE Auto Recovery neu
 - Plug-and-Play ohne Konfiguration erforderlich
 - Lüfterloses Design reduziert den Stromverbrauch und arbeitet geräuschlos an seinem Standort
- 20 Gbps, 14.88 Mpps, 9x 1G RJ-45, 1x SFP/RJ-45, 209x126x26 mm



Management-Funktionen		Energie	
Switch-Typ *	Unmanaged	Eingangsstrom	2.43 A
Anschlüsse und Schnittstellen		Eingangsspannung	53.5 V
Anzahl der basisschaltenden RJ-45 Ethernet Ports *	9	Stromverbrauch (max.)	141,4 W
Basic Switching RJ-45 Ethernet Ports-Typ *	Gigabit Ethernet (10/100/1000)	Power over Ethernet (PoE)	
Anzahl Combo-SFP-Anschlüsse	1	Power over Ethernet (PoE) *	✓
Netzwerk		Anzahl Power over Ethernet plus (PoE+) Anschlüsse	8
Netzstandard *	IEEE 802.3af, IEEE 802.3at, IEEE 802.3i, IEEE 802.3u, IEEE 802.3x, IEEE 802.3z	Power over Ethernet (PoE) Leistung pro Anschluss	30 W
10G-Unterstützung *	✗	Gesamtleistung Power over Ethernet (PoE)	123 W
Kupfer Ethernet Verkabelungstechnologie unterstützte Kabeltypen	10BASE-T, 100BASE-TX Cat3, Cat4, Cat5, Cat5e	Betriebsbedingungen	
Unterstützung Datenflusssteuerung	✓	Betriebstemperatur	0 - 40 °C
Auto MDI/MDI-X	✓	Temperaturbereich bei Lagerung	-40 - 70 °C
Auto-Negotiation-Funktion	✓	Relative Luftfeuchtigkeit in Betrieb	10 - 90%
Selbstlernen von MAC-Adressen unterstützt	✓	Luftfeuchtigkeit bei Lagerung	5 - 90%
Auto-Änderung von MAC-Adressen unterstützt	✓	Wärmeableitung	482,17 BTU/h
Datenübertragung		Gewicht und Abmessungen	
Routing-/Switching-Kapazität *	20 Gbit/s	Breite	209 mm
MAC-Adressentabelle *	4000 Eintragungen	Tiefe	126 mm
Store-and-Forward	✓	Höhe	26 mm
Datenpaket-Pufferspeicher	14,88 MB	Lieferumfang	
		Schnellstartübersicht	✓
		Verpackungsdaten	
		Verpackungsbreite	240 mm
		Verpackungstiefe	315 mm
		Verpackungshöhe	70 mm

Design		Verpackungsdaten	
Rack-Einbau *	✗	Paketgewicht	1,41 kg
Produktfarbe	Schwarz	Zertifikate	
LED-Anzeigen	✓	Zertifizierung	CE, FCC
Leistungen		Logistikdaten	
Ventilatorlos	✓	Warentarifnummer (HS)	85176990
Energie			
Energiequelle *	Gleichstrom		



6935364052683




0845973099534



845973099534



6935364052690

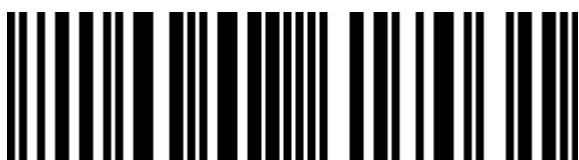

1210002617031



1210002617024

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.